


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 09/25/06'		

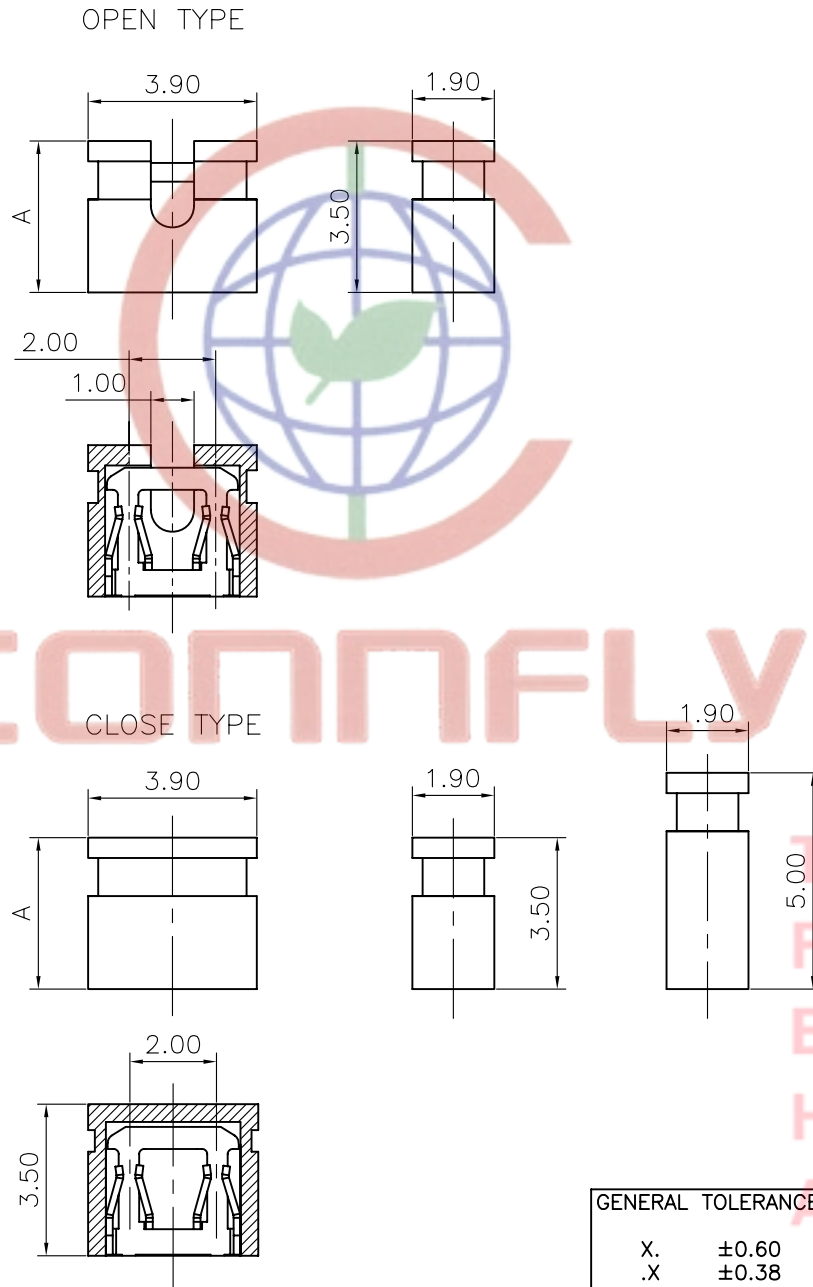

NOTES:

1. SPECIFICATION:

- 1.1 CONTACT RESISTANCE: 30mΩ MAX.
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 250V AC(rms) FOR 1 MINUTE.
- 1.3 INSULATION RESISTANCE: 500MΩ MINI.
- 1.4 OPERATING TEMPERATURE: -40°C~+105°C.

2. PRODUCT NUMBER CODE:

DS1028 - X X X X X

PROFILE HEIGHT(DIM A):  
1: 3.50mm  
2: 5.00mm

CONTACT PLATING:  
F1: FULL GOLD FLASH  
N: NICKEL  
2: GOLD+NICKEL

HOUSING COLOR:  
B: BLACK U:BLUE Y:YELLOW  
W: WHITE E:GREEN R:RED

HOUSING TYPE:  
A:OPEN B:CLOSE

No.OF CONTACTS:  
2: 2pin

SERIES No:  
DS1028

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MINI JUMPER PITCH 2.00mm				
X.	±0.60	X.	±5°	UNITS	mm						
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1028 SERIES				
.XX	±0.25	.XX	±2°								
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>						
SCALE		1:1	SHEET							1 OF 1	
DRAWING NO.		C-DS1028-XXXXX									

Tel:86-574-6350817  
 Fax:86-574-6351817  
 E-mail:sale@zhenqin.com.cn  
 Http://www.connfly.com