



Specification

(Test Condition, 25°C)

1. Housing Material/ Color.....ABS / Black
2. Voice Coil Impedance 6 Ohm (at 1 KHz)
3. Voice Coil Dimension $\varnothing 25.4$ mm(Dia.)
4. Magnet Size $\varnothing 60*32*10$ mm(Dia.*dia.*H)
5. Power Rating RMS 15 W
6. Power Rating Peak 20 W
7. Frequency Range 500~10000Hz
8. Resonant Freq. FO.1.5KHz $\pm 10\%$
9. S.P.L. Min. 100dB(at 1 meter, 1W)
10. Load Test 8 Hours
11. Heat Test 8 Hours (at 60°C)
12. Operating Temperature range -20 ~ +60°C
13. Wires Connection Black, white (Non-polarized)
14. Weight 350 ± 10 g

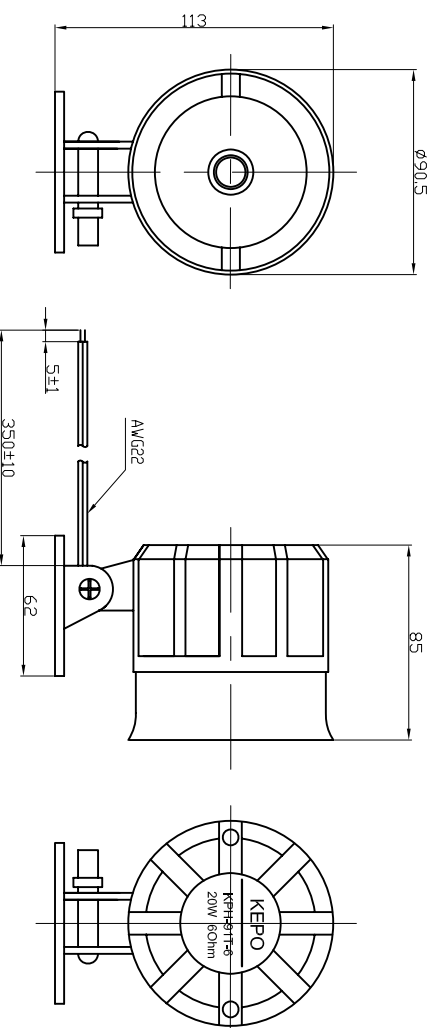

No.		DESCRIPTION		APPROVED		DATE	
TOLERANCES UNLESS NOTED OTHERWISE		APPROVALS		DATE		UNIT	
XXX ±		DRAWN		DATE		DWG NO.	
XXX ±		CHECKED		DATE		KP3.842.455	
FIRST ANGLE PROJECTION		APPROVED		06.10.23		SCALE	
NOT TO SCALE		APPROVED		06.10.23		SHRIBET	
KEPO NINGBO KEPO ELECTRONIC CO.,LTD		Electronic Horn		UNIT		VER. 1.1	
http://www.chinaacoustic.com		KPHT-91T-6		mm			

