



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
09/24/05	A	Updated Title	T.B.	B.S.	
10/22/05	B	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
8/11/07	C	UPDATED SPECIFICATIONS	T.B.	B.S.	
10/12/07	D	UPDATED DIM. FOR PCB LAYOUT	T.B.	B.S.	
6/06/08	E	Temperature range was -40°C to +315°C	T.B.	B.S.	

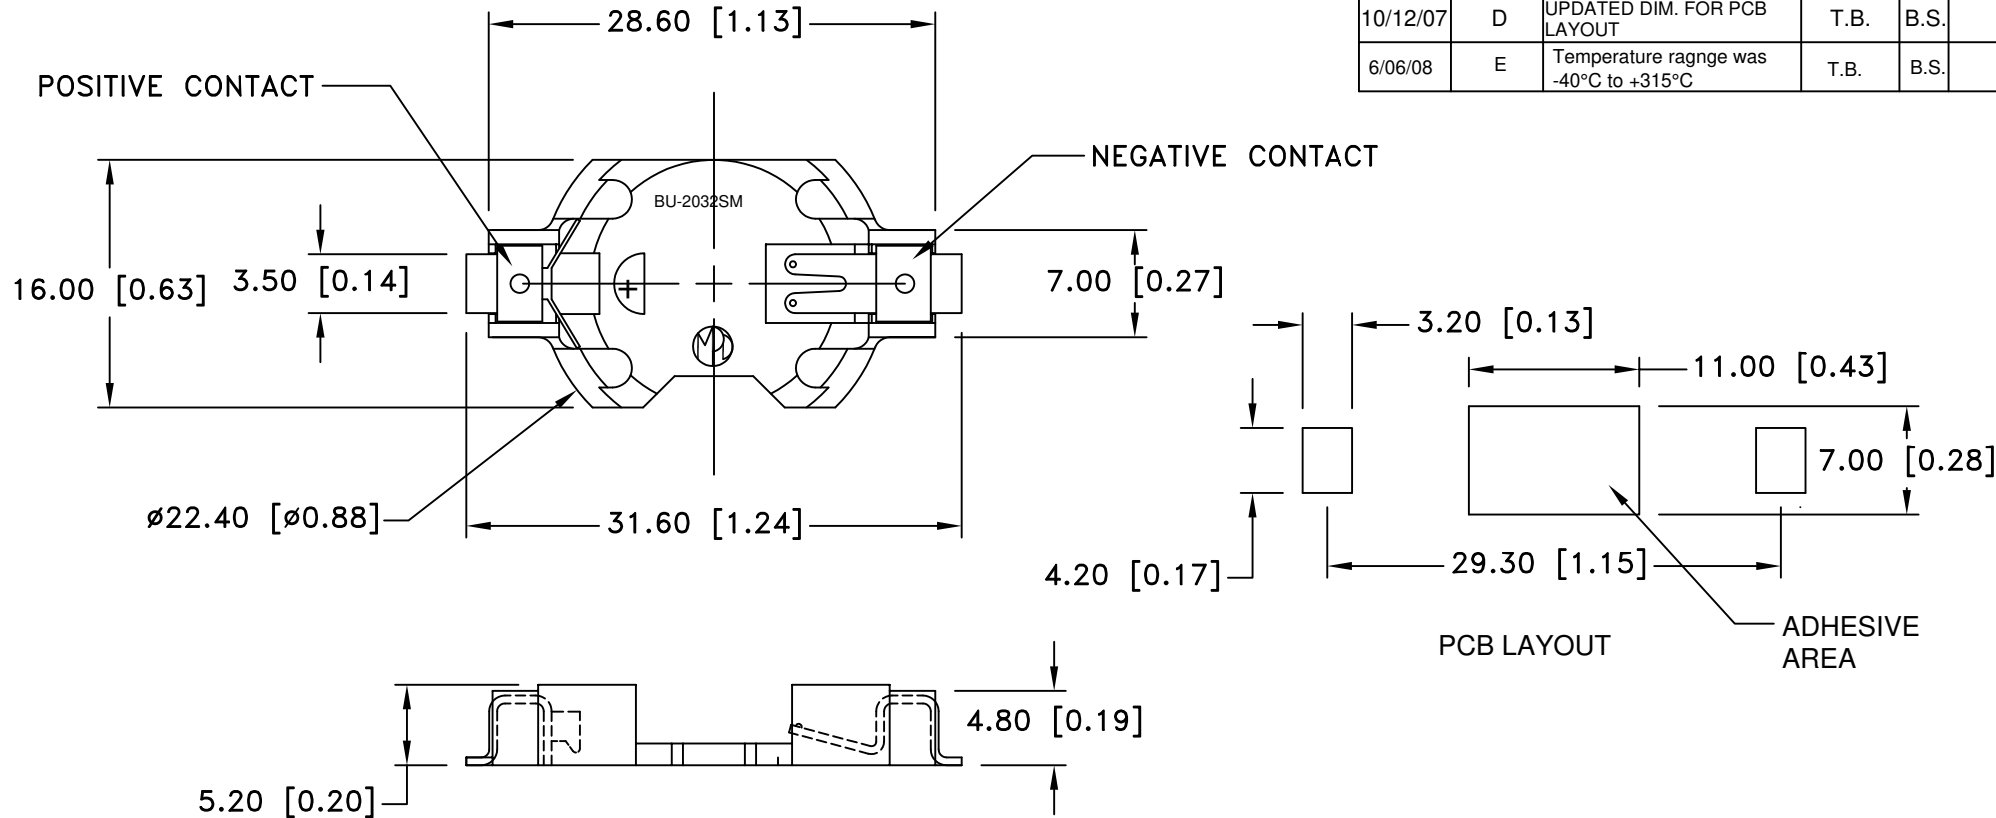

SPECIFICATIONS:

- * Holder material- White, 30% glass reinforced Liquid Crystal Polymer resin, UL File No. E123598, UL94V-0
- * Contacts : STAINLESS STEEL 301, spring temper, Gold Flash overall
- * Temperature range: -40°C to +280°C
- * Vibration Test: 10-50-10 Hz swept in 60 seconds
X,Y,Z direction: 1 hour each direction
- * Result: No dislodgement of the cell or damage
No discontinuity over 10 micro-seconds
- * Shock Test: Half sine wave acceleration 150G. 6 micro-seconds
3 shock pulses each direction per axis, total of 18 pulses
- * Result: No evidence of physical damage
- * ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title BU2032-SM CR2032 SMD BATTERY HOLDER		
Fractional ± .8 (.030)	Date 6/06/08	Drawing Number BU2032SM-G	
Angular ± 3°			