


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
04/21/17	H	DIM. 58.0 WAS 57.20 ADDED MOUNTING HOLES	T.B.	B.S.	
04/29/17	J	DIM. 32.95 WAS 32.70 ADDED DIM. Ø3.65, 14.25, 15.25, 29.00	T.B.	B.S.	
11/22/17	K	ADDED CHAMFER	T.B.	B.S.	

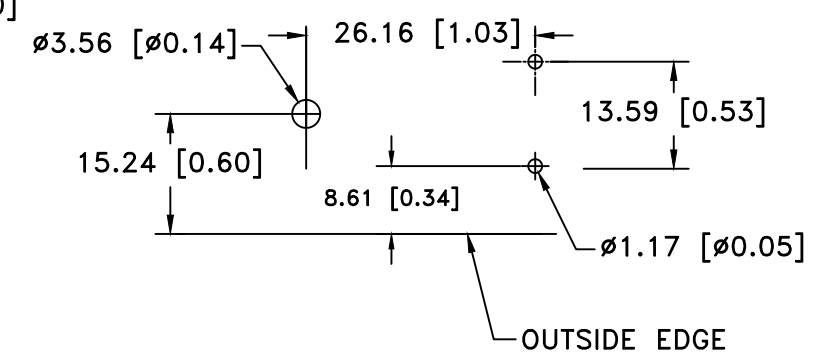


PCB LAYOUT

NOTES:

- MATERIAL:  
 HOUSING : BLACK POLYPROPYLENE  
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959  
 TEMPERATURE RANGE: -10°C to +100°C  
 RIVETS: BRASS, NICKEL PLATED.  
 SPRING: SPRING STEEL, NICKEL PLATED.  
 PC PINS: SPRING STEEL, NICKEL PLATED  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000

ROHS 2 COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ± .8 (.030)	Title TWO "AA" CELL HOLDER		
Angular ± 3°	Date 11/22/17	Drawing Number BC2AAPC	
		Approved By T.B.	