


GP Batteries

Data Sheet


Model No.: GP362

Description : Silver Oxide Low Drain Button Cell
 Nominal Voltage : 1.55 Volts
 Nominal Dimensions : $\varnothing 7.90 \times 2.10\text{mm}$
 Application : Analog watch
 Average Weight : 0.45g
 Shelf Life : Not less than 90% of the service capacity, following 1st year storage at 20°C.
 Date Code : Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.
 Nominal Service Life : 770 hrs (at 50k Ω Load)
 (to 1.2V at 20°C) 320 days (at 500k Ω Load)

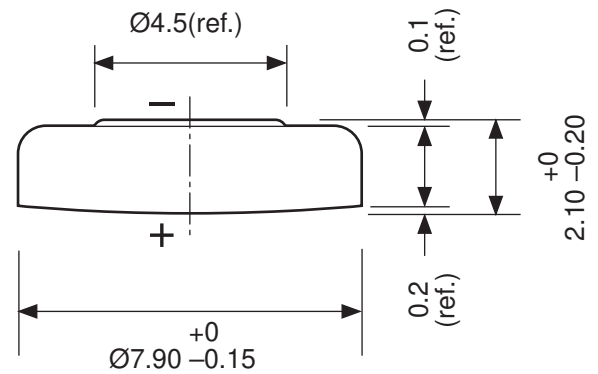

Unit : mm

Typical Discharge Characteristics at 20°C

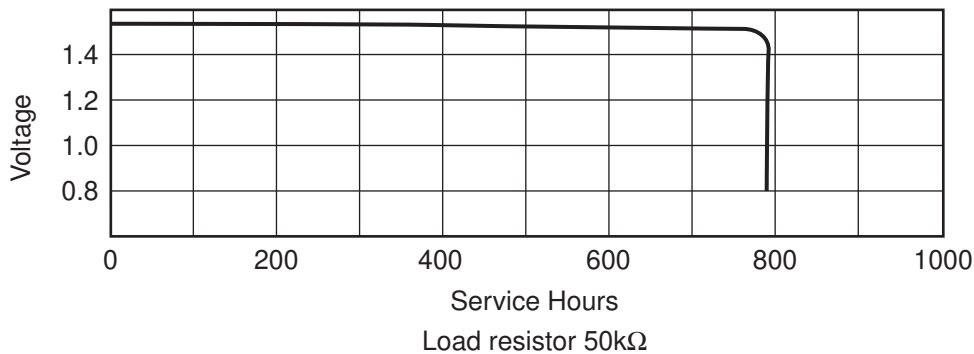

Average Service Capacity:
 24 mAh (rated capacity at 50k Ω load,
 cut off voltage 1.2V at 20°C)

Close circuit voltage:
 1.25 Volts (min.) (load resistor 200 Ω at
 20°C for 1 to 2 seconds)

Cross Reference:

IEC	JIS	EVEREADY	VARTA	DURACELL	PANASONIC	SONY
SR58	SR58	362	V362	D362	SP362	SR721SW