

Surface Mount Aluminum Electrolytic

CA Series




FEATURE

For General Purposes Series with 85°C 2000 Hours

Suitable for AV (TV, Video, Audio), Personal Computer, Home Appliance



MARKING

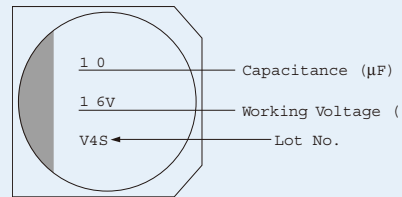

RoHS
COMPLIANT

Unit : mm

DIMENSIONS



SIZE CODE	D ϕ	L	A	H	I	W	P	K
B	4.0	5.4	4.3	5.5 Max.	1.8	0.65 \pm 0.1	1.0	0.35 $^{+0.15}_{-0.20}$
C	5.0	5.4	5.3	6.5 Max.	2.2	0.65 \pm 0.1	1.5	0.35 $^{+0.15}_{-0.20}$
D	6.3	5.4	6.6	7.8 Max.	2.6	0.65 \pm 0.1	2.2	0.35 $^{+0.15}_{-0.20}$
E	8.0	6.5	8.3	9.4 Max.	3.4	0.65 \pm 0.1	2.2	0.35 $^{+0.15}_{-0.20}$
F	8.0	10.5	8.3	10.0 Max.	3.4	0.90 \pm 0.2	3.1	0.70 \pm 0.20
G	10.0	10.5	10.3	12.0 Max.	3.5	0.90 \pm 0.2	4.6	0.70 \pm 0.20
H	6.3	7.7	6.6	0.8 Max.	2.6	0.65 \pm 0.1	2.2	0.35 $^{+0.15}_{-0.20}$

SMD TYPE ORDERING CODE

