

Metallized Polypropylene (PP) Capacitors PCM 7.5 mm to 52.5 mm

Special Features

- High volume/capacitance ratio
- Self-healing
- Very low dissipation factor
- Negative capacitance change versus temperature
- Very low dielectric absorption
- According to RoHS 2011/65/EU

Typical Applications

For high frequency applications e.g.

- Sample and hold
- Timing
- Oscillating circuits
- High frequency coupling and decoupling

Construction


Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

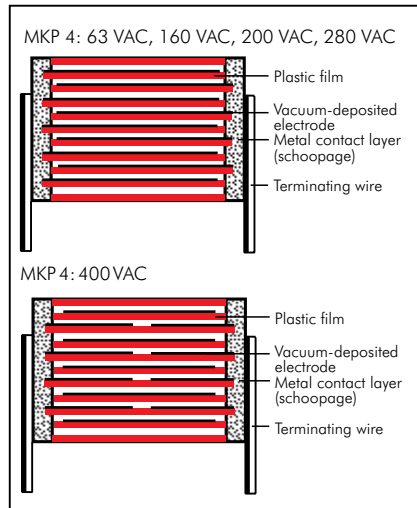

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire.

Marking:

Colour: Red. Marking: Black.
Epoxy resin seal: Red

Electrical Data

Capacitance range:

0.01 μ F to 150 μ F (E12-values on request)

Rated voltages:

100 VDC, 250 VDC, 400 VDC, 630 VDC, 1000 VDC

Capacitance tolerances:

$\pm 20\%$, $\pm 10\%$, $\pm 5\%$

Operating temperature range:

-55°C to $+100^\circ\text{C}$

Climatic test category:

55/100/56 in accordance with IEC

Insulation resistance at $+20^\circ\text{C}$:

$C \leq 0.33 \mu\text{F}$: $\geq 1 \times 10^5 \text{ M}\Omega$

(mean value: $5 \times 10^5 \text{ M}\Omega$)

$C > 0.33 \mu\text{F}$: $\geq 30\,000 \text{ sec (M}\Omega \times \mu\text{F)}$

(mean value: 100\,000 sec)

Measuring voltage: 100 V/1 min.

Dissipation factors at $+20^\circ\text{C}$:

$\tan \delta \leq 10 \times 10^{-4}$ at 1 kHz ($C \leq 50 \mu\text{F}$)

$\tan \delta \leq 15 \times 10^{-4}$ at 1 kHz ($C > 50 \mu\text{F}$)

Maximum pulse rise time:

Capacitance μF	max. pulse rise time V/ μsec at $T_A < 40^\circ\text{C}$				
	100 VDC	250 VDC	400 VDC	630 VDC	1000 VDC
0.01 ... 0.022	450	450	450	500	550
0.033 ... 0.068	250	250	300	350	400
0.1 ... 0.22	150	150	200	250	300
0.33 ... 0.68	100	100	150	200	200
1.0 ... 2.2	75	100	100	150	150
3.3 ... 4.7	60	100	100	120	140
6.8 ... 10	40	50	60	85	100
15 ... 33	35	50	18	36	-
47 ... 150	10	13	-	-	-

for pulses equal to the rated voltage

Mechanical Tests

Pull test on pins:

$d \leq 0.8 \phi$: 10 N in direction of pins

$d > 0.8 \phi$: 20 N in direction of pins

according to IEC 60068-2-1

Vibration:

6 hours at 10...2000 Hz and 0.75 mm

displacement amplitude or 10 g in

accordance with IEC 60068-2-6

Low air density:

1kPa = 10 mbar in accordance with

IEC 60068-2-13

Bump test:

4000 bumps at 390 m/sec²

in accordance with IEC 60068-2-29

Test specifications:

In accordance with IEC 60384-16

Test voltage: 1.6 U_r , 2 sec.

Dielectric absorption: 0.05 %

Voltage derating:

A voltage derating factor of 1.35 % per K

must be applied from $+85^\circ\text{C}$ for DC

voltages and from $+75^\circ\text{C}$ for AC

voltages.

Reliability:

Operational life > 300\,000 hours

Failure rate < 2 fit ($0.5 \times U_r$ and 40°C)

Specific dissipation:

Box size* WxHxL in mm	Specific dissipation in Watts per K above the ambient temperature
35 x 50 x 57	0.132
45 x 55 x 57	0.164
45 x 65 x 57	0.184

* other box sizes see page 10.

Packing

Available taped and reeled up to and

including case size 15 x 26 x 31.5 /

PCM 27.5 mm.

Detailed taping information and graphs

at the end of the catalogue.

For further details and graphs please

refer to Technical Information.

Continuation

General Data

Capacitance	100 VDC/63 VAC*					250 VDC/160 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 µF	3	8.5	10	7.5	MKP4D021002B	3	8.5	10	7.5	MKP4F021002B
0.015 "	3	8.5	10	7.5	MKP4D021502B	3	8.5	10	7.5	MKP4F021502B
0.022 "	3	8.5	10	7.5	MKP4D022202B	3	8.5	10	7.5	MKP4F022202B
0.033 "	3	8.5	10	7.5	MKP4D023302B	3	8.5	10	7.5	MKP4F023302B
	4	9	13	10	MKP4D023303C	4	9	13	10	MKP4F023303C
0.047 "	4	9	10	7.5	MKP4D024702C	4	9	10	7.5	MKP4F024702C
	4	9	13	10	MKP4D024703C	4	9	13	10	MKP4F024703C
0.068 "	4	9	10	7.5	MKP4D026802C	4	9	10	7.5	MKP4F026802C
	4	9	13	10	MKP4D026803C	4	9	13	10	MKP4F026803C
0.1 µF	4.5	9.5	10.3	7.5	MKP4D031002D	4.5	9.5	10.3	7.5	MKP4F031002D
	4	9	13	10	MKP4D031003C	4	9	13	10	MKP4F031003C
0.15 "	5	10.5	10.3	7.5	MKP4D031502E	5	10.5	10.3	7.5	MKP4F031502E
	5	11	13	10	MKP4D031503F	5	11	13	10	MKP4F031503F
0.22 "	6	12	13	10	MKP4D032203G	6	12	13	10	MKP4F032203G
	5	11	18	15	MKP4D032204B	5	11	18	15	MKP4F032204B
0.33 "	6	12.5	18	15	MKP4D033304C	6	12.5	18	15	MKP4F033304C
0.47 "	7	14	18	15	MKP4D034704D	7	14	18	15	MKP4F034704D
0.68 "	8	15	18	15	MKP4D036804F	8	15	18	15	MKP4F036804F
	6	15	26.5	22.5	MKP4D036805B	6	15	26.5	22.5	MKP4F036805B
1.0 µF	7	16.5	26.5	22.5	MKP4D041005D	7	16.5	26.5	22.5	MKP4F041005D
1.5 "	10.5	19	26.5	22.5	MKP4D041505G	10.5	19	26.5	22.5	MKP4F041505G
2.2 "	11	21	26.5	22.5	MKP4D042205I	11	21	26.5	22.5	MKP4F042205I
	11	21	31.5	27.5	MKP4D042206B	11	21	31.5	27.5	MKP4F042206B
3.3 "	13	24	31.5	27.5	MKP4D043306D	13	24	31.5	27.5	MKP4F043306D
4.7 "	13	24	31.5	27.5	MKP4D044706D	15	26	31.5	27.5	MKP4F044706F
6.8 "	15	26	31.5	27.5	MKP4D046806F	17	29	31.5	27.5	MKP4F046806G
	13	24	41.5	37.5	MKP4D046807C	15	26	41.5	37.5	MKP4F046807D
10 µF	17	29	41.5	37.5	MKP4D051007E	19	32	41.5	37.5	MKP4F051007F
15 "	19	32	41.5	37.5	MKP4D051507F	20	39.5	41.5	37.5	MKP4F051507G
22 "	20	39.5	41.5	37.5	MKP4D052207G	24	45.5	41.5	37.5	MKP4F052207H
33 "	24	45.5	41.5	37.5	MKP4D053307H	35	50	41.5	37.5	MKP4F053307J
47 "	35	50	41.5	37.5	MKP4D054707J	35	50	57	52.5	MKP4F054709F
68 "	40	55	41.5	37.5	MKP4D056807K	45	65	57	52.5	MKP4F056809J
	35	50	57	52.5	MKP4D056809F					
100 µF	45	55	57	52.5	MKP4D061009H					
150 "	45	65	57	52.5	MKP4D061509J					

* AC voltage: $f \leq 400 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{URC} \leq U_r$

New values

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Part number completion:

Version code: 2-pin = 00
 4-pin = D4
 Tolerance: 20 % = M
 10 % = K
 5 % = J
 Packing: bulk = S
 Pin length: 6-2 = SD
 Taped version see page 128.

Rights reserved to amend design data without prior notification.

Continuation page 53

Continuation

General Data

Capacitance	400 VDC/220 VAC*					630 VDC/280 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 µF	3	8.5	10	7.5	MKP4G021002B_-----	3	8.5	10	7.5	MKP4J021002B_-----
						4	9	13	10	MKP4J021003C_-----
0.015 "	4	9	10	7.5	MKP4G021502C_-----	4	9	10	7.5	MKP4J021502C_-----
	4	9	13	10	MKP4G021503C_-----	4	9	13	10	MKP4J021503C_-----
0.022 "	4.5	9.5	10.3	7.5	MKP4G022202D_-----	4.5	9.5	10.3	7.5	MKP4J022202D_-----
	4	9	13	10	MKP4G022203C_-----	4	9	13	10	MKP4J022203C_-----
0.033 "	5	10.5	10.3	7.5	MKP4G023302E_-----	5	10.5	10.3	7.5	MKP4J023302E_-----
	4	9	13	10	MKP4G023303C_-----	4	9	13	10	MKP4J023303C_-----
0.047 "	5	10.5	10.3	7.5	MKP4G024702E_-----	5.7	12.5	10.3	7.5	MKP4J024702F_-----
	5	11	13	10	MKP4G024703F_-----	5	11	13	10	MKP4J024703F_-----
0.068 "	5.7	12.5	10.3	7.5	MKP4G026802F_-----	6	12	13	10	MKP4J026803G_-----
	5	11	13	10	MKP4G026803F_-----	6	12.5	18	15	MKP4J026804C_-----
0.1 µF	6	12	13	10	MKP4G031003G_-----	7	14	18	15	MKP4J031004D_-----
	5	11	18	15	MKP4G031004B_-----					
0.15 "	6	12.5	18	15	MKP4G031504C_-----	8	15	18	15	MKP4J031504F_-----
						6	15	26.5	22.5	MKP4J031505B_-----
0.22 "	7	14	18	15	MKP4G032204D_-----	9	16	18	15	MKP4J032204J_-----
						7	16.5	26.5	22.5	MKP4J032205D_-----
0.33 "	8	15	18	15	MKP4G033304F_-----	8.5	18.5	26.5	22.5	MKP4J033305F_-----
	6	15	26.5	22.5	MKP4G033305B_-----					
0.47 "	7	16.5	26.5	22.5	MKP4G034705D_-----	10.5	19	26.5	22.5	MKP4J034705G_-----
						11	21	31.5	27.5	MKP4J034706B_-----
0.68 "	8.5	18.5	26.5	22.5	MKP4G036805F_-----	11	21	31.5	27.5	MKP4J036806B_-----
1.0 µF	11	21	26.5	22.5	MKP4G041005I_-----	13	24	31.5	27.5	MKP4J041006D_-----
	11	21	31.5	27.5	MKP4G041006B_-----					
1.5 "	11	21	31.5	27.5	MKP4G041506B_-----	15	26	31.5	27.5	MKP4J041506F_-----
2.2 "	15	26	31.5	27.5	MKP4G042206F_-----	17	29	41.5	37.5	MKP4J042207E_-----
3.3 "	17	29	31.5	27.5	MKP4G043306G_-----	19	32	41.5	37.5	MKP4J043307F_-----
	17	29	41.5	37.5	MKP4G043307E_-----					
4.7 "	19	32	41.5	37.5	MKP4G044707F_-----	20	39.5	41.5	37.5	MKP4J044707G_-----
6.8 "	20	39.5	41.5	37.5	MKP4G046807G_-----	24	45.5	41.5	37.5	MKP4J046807H_-----
10 µF	24	45.5	41.5	37.5	MKP4G051007H_-----	35	50	41.5	37.5	MKP4J051007J_-----
15 "	31	46	41.5	37.5	MKP4G051507I_-----	35	50	57	52.5	MKP4J051509F_-----
22 "	40	55	41.5	37.5	MKP4G052207K_-----	45	65	57	52.5	MKP4J052209J_-----
	35	50	57	52.5	MKP4G052209F_-----					
33 "	45	65	57	52.5	MKP4G053309J_-----					

* AC voltage: $f \leq 400 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

New values

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Part number completion:

Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD
Taped version see page 128.		

Rights reserved to amend design data without prior notification.

Continuation page 54

Continuation

General Data

Capacitance	1000 VDC/400 VAC*				Part number
	W	H	L	PCM**	
0.01 μF	5.7	12.5	10.3	7.5	MKP4O121002F
	5	11	13	10	MKP4O121003F
0.015 "	5	11	13	10	MKP4O121503F
	5	11	18	15	MKP4O121504B
0.022 "	5	11	18	15	MKP4O122204B
0.033 "	6	12.5	18	15	MKP4O123304C
0.047 "	7	14	18	15	MKP4O124704D
0.068 "	8	15	18	15	MKP4O126804F
	6	15	26.5	22.5	MKP4O126805B
0.1 μF	9	16	18	15	MKP4O131004J
	7	16.5	26.5	22.5	MKP4O131005D
0.15 "	8.5	18.5	26.5	22.5	MKP4O131505F
0.22 "	11	21	26.5	22.5	MKP4O132205L
	11	21	31.5	27.5	MKP4O132206B
0.33 "	11	21	31.5	27.5	MKP4O133306B
0.47 "	13	24	31.5	27.5	MKP4O134706D
0.68 "	17	29	31.5	27.5	MKP4O136806G
1.0 μF	17	29	41.5	37.5	MKP4O141007E
1.5 "	20	39.5	41.5	37.5	MKP4O141507G
2.2 "	24	45.5	41.5	37.5	MKP4O142207H
3.3 "	31	46	41.5	37.5	MKP4O143307I
4.7 "	35	50	41.5	37.5	MKP4O144707J
6.8 "	35	50	57	52.5	MKP4O146809F
10 μF	45	65	57	52.5	MKP4O151009J


* AC voltage: $f \leq 400 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

New values

** PCM = Printed circuit module = pin spacing






Dims. in mm.

Part number completion:	
Version code:	2-pin = 00
	4-pin = D4
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 128.	

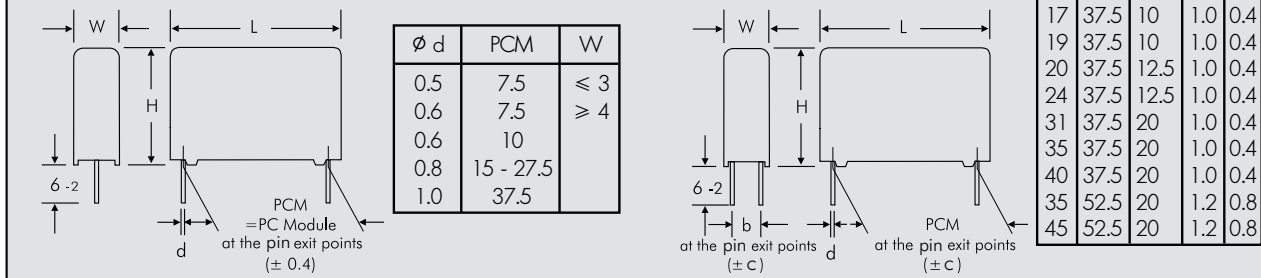

Rights reserved to amend design data without prior notification.

Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide).

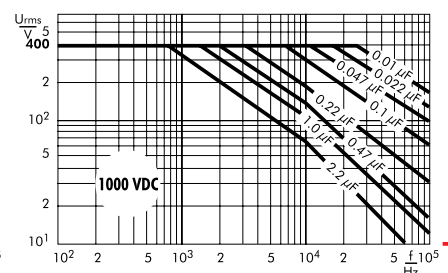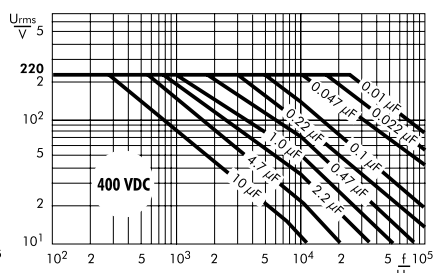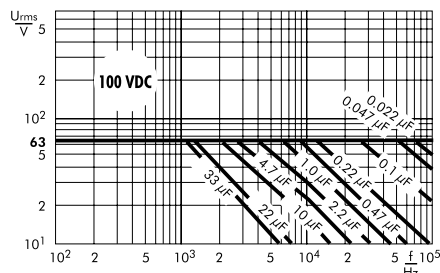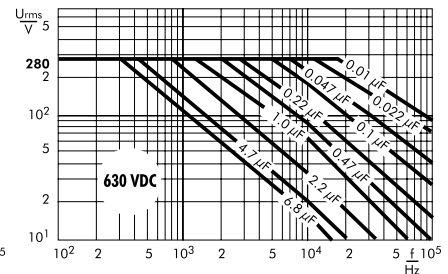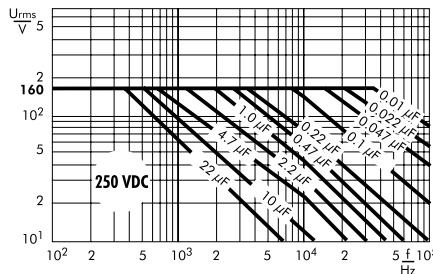

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{max.} \leq 125^{\circ}C$
soldering: $T_{max.} \leq 135^{\circ}C$

Polypropylene: preheating: $T_{max.} \leq 100^{\circ}C$
soldering: $T_{max.} \leq 110^{\circ}C$


Single wave soldering

Soldering bath temperature: $T < 260^{\circ}C$
Dwell time: $t < 5 \text{ sec}$

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}C$
Dwell time: $\Sigma t < 5 \text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

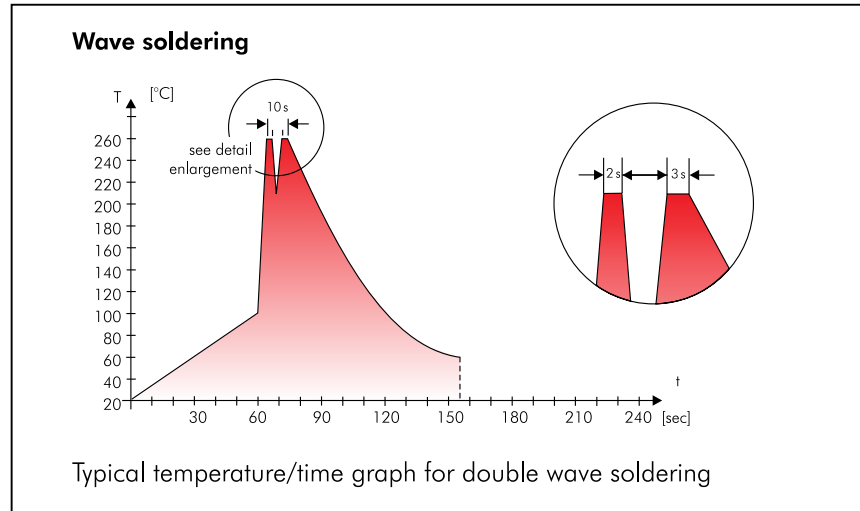

WIMA Quality and Environmental Philosophy

ISO 9001:2008 Certification

ISO 9001:2008 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2008 of our factories by the VDE inspectorate certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application of WPCS during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- AQL check

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- foamed polystyrene (Styropor®)
- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2011/65/EU certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

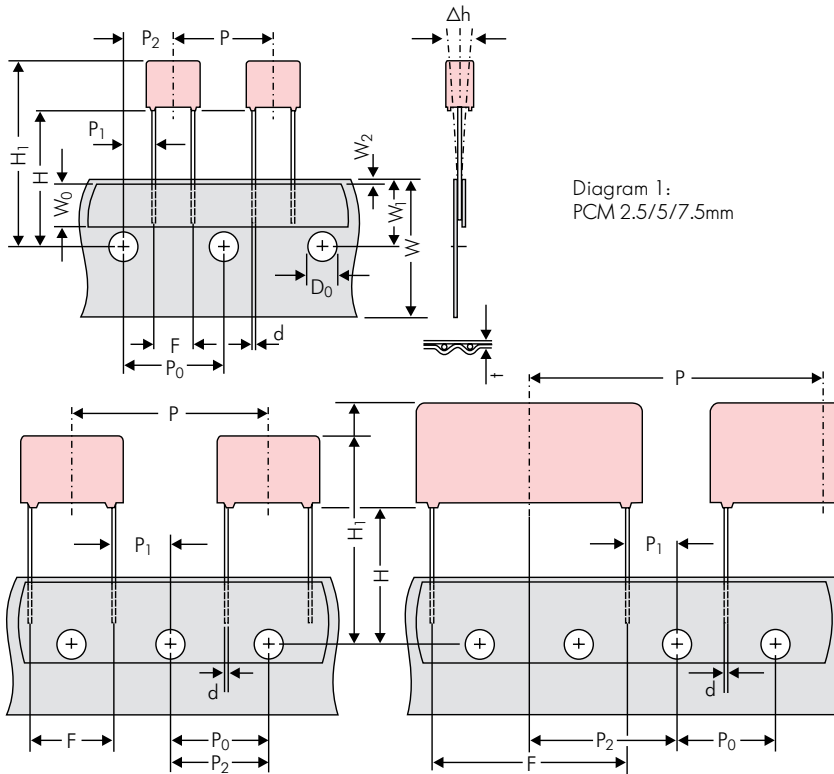


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 tapping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping										
		PCM 2.5 tapping	PCM 5 tapping	PCM 7.5 tapping	PCM 10 tapping*	PCM 15 tapping*	PCM 22.5 tapping	PCM 27.5 tapping				
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5				
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape				
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5				
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.				
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2				
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5				
Feed hole pitch	P ₀	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch				
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7				
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3				
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5				
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0				
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8				
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}				
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.				
Total tape thickness	t	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2				
Package (see also page 129)	ROLL/AMMO			AMMO								
	REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2	depending on comp. dimensions		REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2 or 66 ±2	REEL	φ 500 max. φ 25 ±1	B 60 ±2 68 ±2	depending on PCM and component dimensions
Unit	see details page 130.											

Dims in mm.

* Diameter of pins see General Data.


* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 1). P₀ = 12.7 or 15.0 is possible


Please clarify customer-specific deviations with the manufacturer.

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

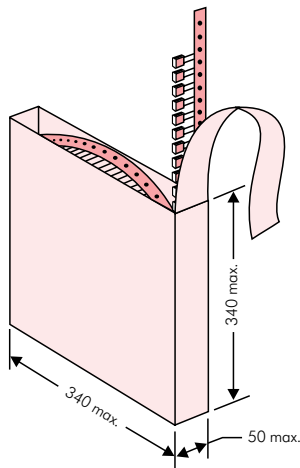

■ AMMO Packaging

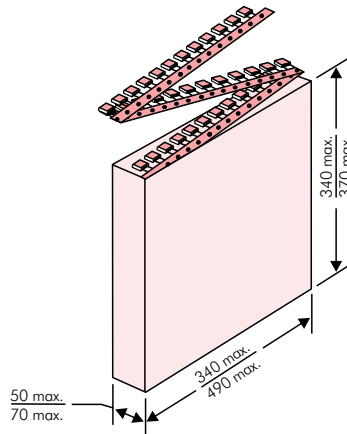

■ REEL Packaging

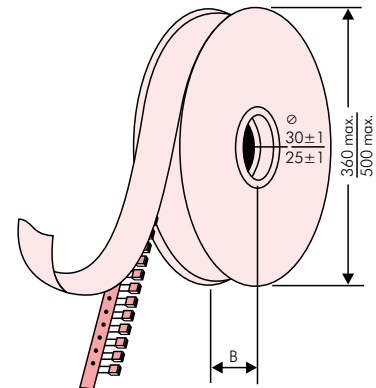

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

WIMA Best Capacitors Made in Germany		Werk Unna
Supplier-ID: 123456789	RoHS 2011/65/EC	Date Code: 08.10.10
Purchase Order No. (P/O): Bestellung xyz		Quantity: 5.000
Customer Part No.: KUNDETEILENUMMER		Customer No.: 0000100002
		Gross Weight [g]: 1870
WIMA Confirmation No.: 0001004053000100	WIMA Part No.: MKS2C034701C00K89D	
Handling Unit: MKS 2	QTY: 5.000	COO: DE
	MKS 2 0.47 µF 63 VDC 3.5x8.5x7.2 RMS	
1000067326	Standard 10% Loss - Standard	Drahte 6-2
	Vorlage Debitor Inland	Week 03/2011

BARCODE „Code 39“



Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm

PCM	Size				bulk	pcs. per packing unit								
						ROLL		REEL				AMMO		
	W	H	L	Codes		S	H16.5	H18.5	ø 360	ø 500	340 × 340	490 × 370		
					N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000		2200	2500			2800			
	3	7.5	4.6	0C	5000		2000	2300			2300			
	3.8	8.5	4.6	0D	5000		1500	1800			1800			
	4.6	9	4.6	0E	5000		1200	1500			1500			
	5.5	10	4.6	0F	5000		900	1200			1200			
5 mm	2.5	6.5	7.2	1A	5000		2200	2500			2800			
	3	7.5	7.2	1B	5000		2000	2300			2300			
	3.5	8.5	7.2	1C	5000		1600	2000			2000			
	4.5	6	7.2	1D	6000		1300	1500			1500			
	4.5	9.5	7.2	1E	4000		1300	1500			1500			
	5	10	7.2	1F	3500		1100	1400			1400			
	5.5	7	7.2	1G	4000		1000	1200			1200			
	5.5	11.5	7.2	1H	2500		1000	1200			1200			
	6.5	8	7.2	1I	2500		800	1000			1000			
	7.2	8.5	7.2	1J	2500		700	1000			1000			
	7.2	13	7.2	1K	2000		700	950			1000			
	8.5	10	7.2	1L	2000		600	800			800			
	8.5	14	7.2	1M	1500		600	800			800			
11	16	7.2	1N	1000		500	600			400				
7.5 mm	2.5	7	10	2A	5000			2500	4400		2500			
	3	8.5	10	2B	5000			2200	4300		2300		4150	
	4	9	10	2C	4000			1700	3200		1700		3100	
	4.5	9.5	10.3	2D	3500			1500	2900		1400		2800	
	5	10.5	10.3	2E	3000			1300	2500		1300			
	5.7	12.5	10.3	2F	2000			1000	2200		1100			
	7.2	12.5	10.3	2G	1500			900	1800		1000			
10 mm	3	9	13	3A	3000			1100	2200				1900	
	4	8.5	13.5	FA	3000			900	1600				1450	
	4	9	13	3C	3000			900	1600				1450	
	4	9.5	13	3D	3000			900	1600				1400	
	5	10	13.5	FB	2000			700	1300				1200	
	5	11	13	3F	3000			700	1300				1200	
	6	12	13	3G	2400			550	1100				1000	
	6	12.5	13	3H	2400			550	1100				1000	
8	12	13	3I	2000			400	800				740		
15 mm	5	11	18	4B	2400			600	1200				1150	
	5	13	19	FC	1000			600	1200				1200	
	6	12.5	18	4C	2000			500	1000				1000	
	6	14	19	FD	1000			500	1000				1000	
	7	14	18	4D	1600			450	900				850	
	7	15	19	FE	1000			450	900				850	
	8	15	18	4F	1200			400	800				740	
	8	17	19	FF	500			400	800				740	
	9	14	18	4H	1200			350	700				650	
	9	16	18	4J	900			350	700				650	
	10	18	19	FG	500			300	650				590	
11	14	18	4M	1000			300	600				540		
22.5 mm	5	14	26.5	5A	1200				800				770	
	6	15	26.5	5B	1000				700				640	
	7	16.5	26.5	5D	760				600				550	
	8	20	28	FH	500				500				480	
	8.5	18.5	26.5	5F	500				480				450	
	10	22	28	FI	540*				420				380	
	10.5	19	26.5	5G	680*				400				360	
	10.5	20.5	26.5	5H	680*				400				360	
	11	21	26.5	5I	680*				380				350	
	12	24	28	FJ	450*				350				310	

* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	W	H	L	Codes		S	N	O	ø 360		ø 500		340 × 340		490 × 370
								H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5
								F	I	H	J	A	C	B	D
27.5 mm	9	19	31.5	6A	640*	-	-	-	-	460/340*		-	-	420	
	11	21	31.5	6B	544*	-	-	-	-	380/280*		-	-	350	
	13	24	31.5	6D	448*	-	-	-	-	300		-	-	290	
	13	25	33	FK	336*	-	-	-	-	-		-	-	-	
	15	26	31.5	6F	384*	-	-	-	-	270		-	-	250	
	15	26	33	FL	288*	-	-	-	-	-		-	-	-	
	17	29	31.5	6G	176*	-	-	-	-	-		-	-	-	
	17	34.5	31.5	6I	176*	-	-	-	-	-		-	-	-	
	20	32	33	FM	216*	-	-	-	-	-		-	-	-	
	20	39.5	31.5	6J	144*	-	-	-	-	-		-	-	-	
37.5 mm	9	19	41.5	7A	480*	-	-	-	-	-		-	-	-	
	11	22	41.5	7B	408*	-	-	-	-	-		-	-	-	
	13	24	41.5	7C	252*	-	-	-	-	-		-	-	-	
	15	26	41.5	7D	144*	-	-	-	-	-		-	-	-	
	17	29	41.5	7E	132*	-	-	-	-	-		-	-	-	
	19	32	41.5	7F	108*	-	-	-	-	-		-	-	-	
	20	39.5	41.5	7G	108*	-	-	-	-	-		-	-	-	
	24	45.5	41.5	7H	84*	-	-	-	-	-		-	-	-	
	31	46	41.5	7I	72*	-	-	-	-	-		-	-	-	
	35	50	41.5	7J	35*	-	-	-	-	-		-	-	-	
40	55	41.5	7K	28*	-	-	-	-	-		-	-	-		
48.5 mm	19	31	56	8D	50*	-	-	-	-	-		-	-	-	
	23	34	56	8E	72*	-	-	-	-	-		-	-	-	
	27	37.5	56	8H	60*	-	-	-	-	-		-	-	-	
	33	48	56	8J	48*	-	-	-	-	-		-	-	-	
	37	54	56	8L	25*	-	-	-	-	-		-	-	-	
52.5 mm	35	50	57	9F	25*	-	-	-	-	-		-	-	-	
	45	55	57	9H	20*	-	-	-	-	-		-	-	-	
	45	65	57	9J	20*	-	-	-	-	-		-	-	-	

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions. Rights reserved to amend design data without prior notification.



WIMA Part Number System

A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 μ F			2.5x6.5x7.2		-		20%	bulk	6-2		

<p>Type description:</p> <p>SMD-PET = SMDT SMD-PPS = SMDI FKP 02 = FKP0 MKS 02 = MKS0 FKS 2 = FKS2 FKP 2 = FKP2 MKS 2 = MKS2 MKP 2 = MKP2 FKS 3 = FKS3 FKP 3 = FKP3 MKS 4 = MKS4 MKP 4 = MKP4 MKP 10 = MKP1 FKP 4 = FKP4 FKP 1 = FKP1 MKP-X2 = MKX2 MKP-X2 R = MKXR MKP-Y2 = MKY2 MP 3-X2 = MPX2 MP 3-X1 = MPX1 MP 3-Y2 = MPY2 MP 3R-Y2 = MPRY Snubber MKP = SNMP Snubber FKP = SNFP GTO MKP = GTOM DC-LINK MKP 3 = DCP3 DC-LINK MKP 4 = DCP4 DC-LINK MKP 4S = DCPS DC-LINK MKP 5 = DCP5 DC-LINK MKP 6 = DCP6 DC-LINK HC = DCH_ DC-LINK HY = DCHY</p>	<p>Rated voltage:</p> <p>50 VDC = B0 63 VDC = C0 100 VDC = D0 250 VDC = F0 400 VDC = G0 450 VDC = H0 600 VDC = I0 630 VDC = J0 700 VDC = K0 800 VDC = L0 850 VDC = M0 900 VDC = N0 1000 VDC = O1 1100 VDC = P0 1200 VDC = Q0 1250 VDC = R0 1500 VDC = S0 1600 VDC = T0 2000 VDC = U0 2500 VDC = V0 3000 VDC = W0 4000 VDC = X0 6000 VDC = Y0 250 VAC = 0W 275 VAC = 1W 300 VAC = 2W 400 VAC = 3W 440 VAC = 4W 500 VAC = 5W ...</p>	<p>Capacitance:</p> <p>22 pF = 0022 47 pF = 0047 100 pF = 0100 150 pF = 0150 220 pF = 0220 330 pF = 0330 470 pF = 0470 680 pF = 0680 1000 pF = 1100 1500 pF = 1150 2200 pF = 1220 3300 pF = 1330 4700 pF = 1470 6800 pF = 1680 0.01 μF = 2100 0.022 μF = 2220 0.047 μF = 2470 0.1 μF = 3100 0.22 μF = 3220 0.47 μF = 3470 1 μF = 4100 2.2 μF = 4220 4.7 μF = 4470 10 μF = 5100 22 μF = 5220 47 μF = 5470 100 μF = 6100 220 μF = 6220 1000 μF = 7100 ...</p>	<p>Size:</p> <p>4.8x3.3x3 Size 1812 = KA 4.8x3.3x4 Size 1812 = KB 5.7x5.1x3.5 Size 2220 = QA 5.7x5.1x4.5 Size 2220 = QB 7.2x6.1x3 Size 2824 = TA 7.2x6.1x5 Size 2824 = TB 10.2x7.6x5 Size 4030 = VA 12.7x10.2x6 Size 5040 = XA 15.3x13.7x7 Size 6054 = YA 2.5x7x4.6 PCM 2.5 = 0B 3x7.5x4.6 PCM 2.5 = 0C 2.5x6.5x7.2 PCM 5 = 1A 3x7.5x7.2 PCM 5 = 1B 2.5x7x10 PCM 7.5 = 2A 3x8.5x10 PCM 7.5 = 2B 3x9x13 PCM 10 = 3A 4x9x13 PCM 10 = 3C 5x11x18 PCM 15 = 4B 6x12.5x18 PCM 15 = 4C 5x14x26.5 PCM 22.5 = 5A 6x15x26.5 PCM 22.5 = 5B 9x19x31.5 PCM 27.5 = 6A 11x21x31.5 PCM 27.5 = 6B 9x19x41.5 PCM 37.5 = 7A 11x22x41.5 PCM 37.5 = 7B 94x49x182 DCH_ = H0 94x77x182 DCH_ = H1 ...</p> <p>Version code:</p> <p>Standard = 00 Version A1 = 1A Version A1.1.1 = 1B Version A2 = 2A ...</p>	<p>Tolerance:</p> <p>\pm20% = M \pm10% = K \pm5% = J \pm2.5% = H \pm1% = E ...</p> <p>Packing:</p> <p>AMMO H16.5 340x340 = A AMMO H16.5 490x370 = B AMMO H18.5 340x340 = C AMMO H18.5 490x370 = D REEL H16.5 360 = F REEL H16.5 500 = H REEL H18.5 360 = I REEL H18.5 500 = J ROLL H16.5 = N ROLL H18.5 = O BLISTER W12 180 = P BLISTER W12 330 = Q BLISTER W16 330 = R BLISTER W24 330 = T Bulk/TPS Standard = S ...</p> <p>Pin length (untaped)</p> <p>3.5 \pm0.5 = C9 6-2 = SD 16 \pm1 = P1 ...</p>
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.