
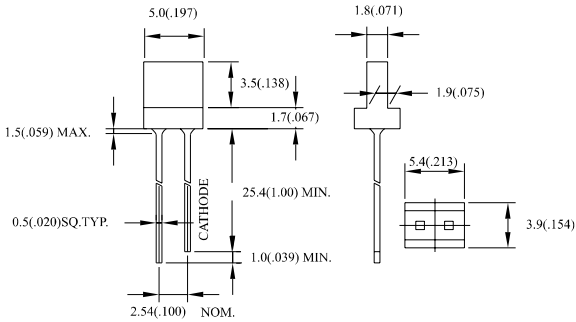
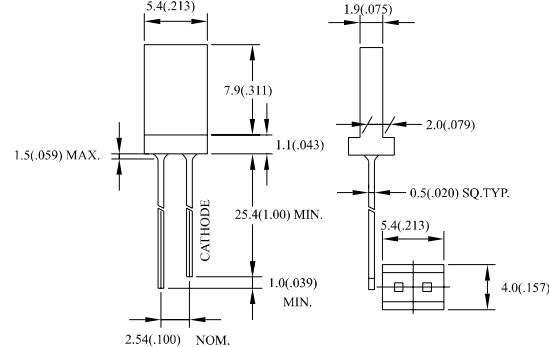
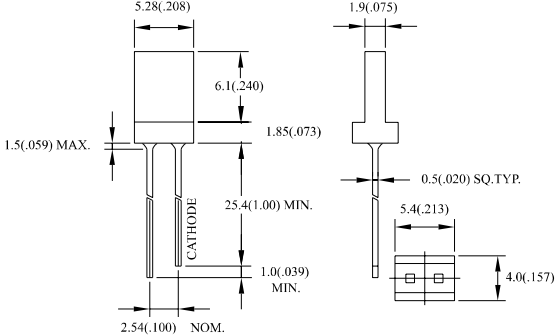
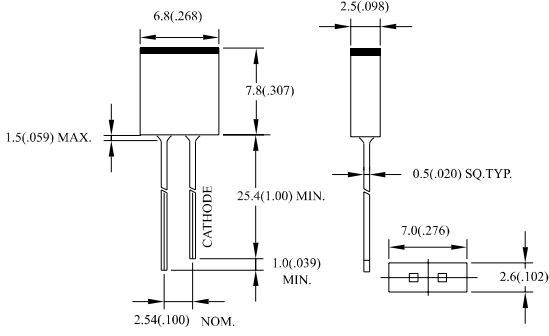
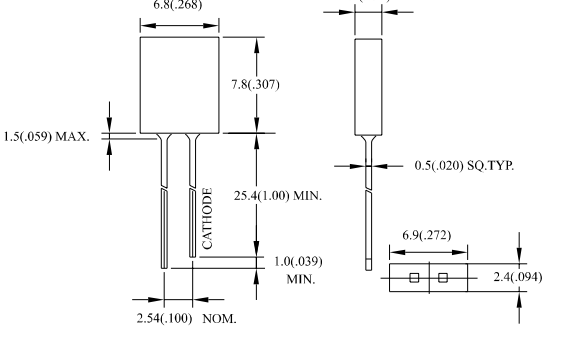
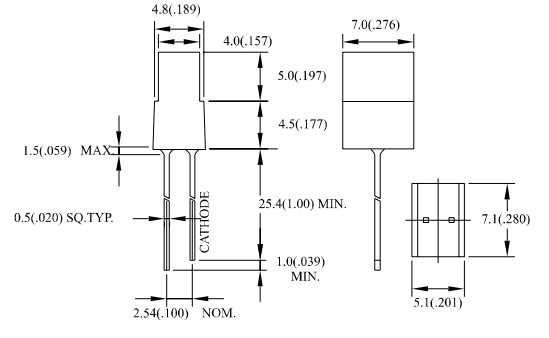
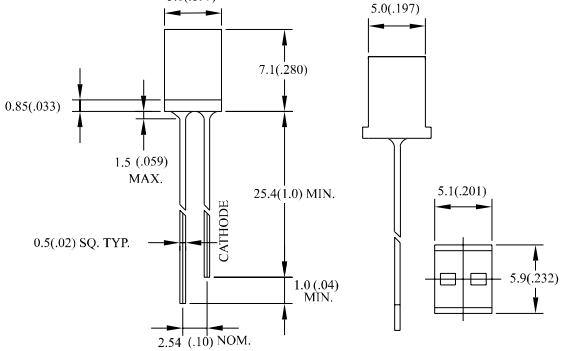


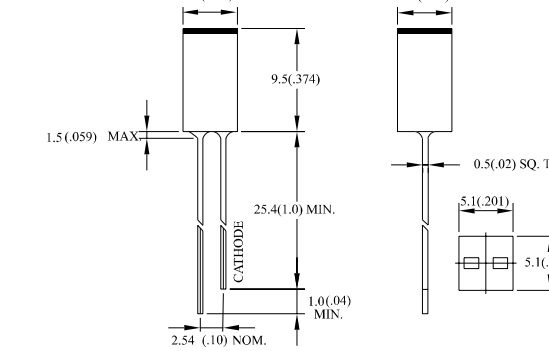

STANDARD LED LAMPS(RECTANGULAR TYPES)

Package	Part No.	Chip		Lens Appearance	Absolute Maximum Ratings				Electro-optical Data(At 20mA)			Viewing Angle 2θ 1/2 (deg)	Drawing No.	
		Material/ Emitted Color	Peak Wave Length λ p (nm)		Δ λ (nm)	Pd (mw)	If (mA)	Peak (mA)	Vf (V)		Iv (mcd)			
									Typ	Max	Typ.			
1.8x5.0x 5.2mm 1.0" Lead Rectangular	BL-R1138A	GaAsP/GaAs/Red	655	Red Diffused	40	80	40	200	1.7	2.0	0.5	125	L-097	
	BL-R5138A	GaP/GaP/ Bright Red	700		90	40	15	50	2.2	2.6	0.8			
	BL-R4538A	GaAsP/GaP/ Hi-Eff Red	635		45	80	30	150	2.0	2.6	6.0			
	BL-R2138A	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	6.0			
	BL-RX1138A	GaP/GaP/ Hi-Eff Green	568		30	80	30	150	2.2	2.6	8.0			
	BL-R3138A	GaAsP/GaP/ Yellow	585		35	80	30	150	2.1	2.6	5.0			
BL-R4138A	GaAsP/GaP/ Orange	635	Orange Diffused	45	80	30	150	2.0	2.6	6.0				
1.9x5.4x 9.0mm 1.0" Lead Rectangular	BL-R1138B	GaAsP/GaAs/Red	655	Red Diffused	40	80	40	200	1.7	2.0	0.6	125	L-098	
	BL-R5138B	GaP/GaP/ Bright Red	700		90	40	15	50	2.2	2.6	0.9			
	BL-R4538B	GaAsP/GaP/ Hi-Eff Red	635		45	80	30	150	2.0	2.6	6.5			
	BL-R2138B	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	6.5			
	BL-RX1138B	GaP/GaP/ Hi-Eff Green	568		30	80	30	150	2.2	2.6	8.5			
	BL-R3138B	GaAsP/GaP / Yellow	585		Yellow Diffused	35	80	30	150	2.1	2.6			5.5
BL-R4138B	GaAsP/GaP / Orange	635	Orange Diffused	45	80	30	150	2.0	2.6	6.5				
1.9x5.3x 8.0mm 1.0" Lead Rectangular	BL-R1138C	GaAsP/GaAs/Red	655	Red Diffused	40	80	40	200	1.7	2.0	0.6	125	L-099	
	BL-R5138C	GaP/GaP/ Bright Red	700		90	40	15	50	2.2	2.6	0.9			
	BL-R4538C	GaAsP/GaP/ Hi-Eff Red	635		45	80	30	150	2.0	2.6	6.5			
	BL-R2138C	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	6.5			
	BL-RX1138C	GaP/GaP/ Hi-Eff Green	568		30	80	30	150	2.2	2.6	8.5			
	BL-R3138C	GaAsP/GaP / Yellow	585		Yellow Diffused	35	80	30	150	2.1	2.6			5.5
BL-R4138C	GaAsP/GaP / Orange	635	Orange Diffused	45	80	30	150	2.0	2.6	6.5				
2.5x7.0x 7.8mm 1.0" Lead Rectangular	BL-R1139-T	GaAsP/GaAs/Red	655	Red Diffused	40	80	40	200	1.7	2.0	3.0	130	L-100	
	BL-R5139-T	GaP/GaP/ Bright Red	700		90	40	15	50	2.2	2.6	5.0			
	BL-R4539-T	GaAsP/GaP/ Hi-Eff Red	635		45	80	30	150	2.0	2.6	12.0			
	BL-R2139-T	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	12.0			
	BL-RX1139-T	GaP/GaP/ Hi-Eff Green	568		30	80	30	150	2.2	2.6	15.0			
	BL-R3139-T	GaAsP/GaP / Yellow	585		Yellow Diffused	35	80	30	150	2.1	2.6			13.0
BL-R4139-T	GaAsP/GaP / Orange	635	Orange Diffused	45	80	30	150	2.0	2.6	12.0				
2.3x7.0x 7.0mm 1.0" Lead Rectangular	BL-R1139A	GaAsP/GaAs/Red	655	Red Diffused	40	80	40	200	1.7	2.0	1.2	130	L-101	
	BL-R5139A	GaP/GaP/ Bright Red	700		90	40	15	50	2.2	2.6	2.0			
	BL-R4539A	GaAsP/GaP/ Hi-Eff Red	635		45	80	30	150	2.0	2.6	7.0			
	BL-R2139A	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	7.0			
	BL-RX1139A	GaP/GaP/ Hi-Eff Green	568		30	80	30	150	2.2	2.6	10.0			
	BL-R3139A	GaAsP/GaP / Yellow	585		Yellow Diffused	35	80	30	150	2.1	2.6			6.0
BL-R4139A	GaAsP/GaP / Orange	635	Orange Diffused	45	80	30	150	2.0	2.6	10.0				
4.0x7.0x 9.5mm 1.0" Lead Rectangular	BL-R1139B	GaAsP/GaAs/Red	655	Red Diffused	40	80	40	200	1.7	2.0	0.4	120	L-102	
	BL-R5139B	GaP/GaP/ Bright Red	700		90	40	15	50	2.2	2.6	0.6			
	BL-R4539B	GaAsP/GaP/ Hi-Eff Red	635		45	80	30	150	2.0	2.6	7.0			
	BL-R2139B	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	7.0			
	BL-RX1139B	GaP/GaP/ Hi-Eff Green	568		30	80	30	150	2.2	2.6	10.0			
	BL-R3139B	GaAsP/GaP / Yellow	585		Yellow Diffused	35	80	30	150	2.1	2.6			6.0
BL-R4139B	GaAsP/GaP / Orange	635	Orange Diffused	45	80	30	150	2.0	2.6	7.0				
5.0x5.0x 7.1mm 1.0" Lead Rectangular	BL-R1130	GaAsP/GaAs/Red	655	Red Diffused	40	80	40	200	1.7	2.0	0.6	150	L-103	
	BL-R5130	GaP/GaP/ Bright Red	700		90	40	15	50	2.2	2.6	1.0			
	BL-R4530	GaAsP/GaP/ Hi-Eff Red	635		45	80	30	150	2.0	2.6	7.0			
	BL-R2130	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	7.0			
	BL-R3130	GaAsP/GaP / Yellow	585		Yellow Diffused	35	80	30	150	2.1	2.6			6.0
	BL-R4130	GaAsP/GaP / Orange	635		Orange Diffused	25	80	30	150	2.0	2.6			7.0
5.0x5.0 9.5mm 1.0" Lead Rectangular	BL-R1130A-T	GaAsP/GaAs/Red	655	Red Diffused	40	80	40	200	1.7	2.0	0.6	150	L-104	
	BL-R5130A-T	GaP/GaP/ Bright Red	700		90	40	15	50	2.2	2.6	1.0			
	BL-R4530A-T	GaAsP/GaP/ Hi-Eff Red	635		45	80	30	150	2.0	2.6	7.0			
	BL-R2130A-T	GaP/GaP/ Green	568	Green Diffused	30	80	30	150	2.2	2.6	7.0			
	BL-R3130A-T	GaAsP/GaP / Yellow	585		Yellow Diffused	35	80	30	150	2.1	2.6			6.0

Remark : 1.Hi-Eff Red / High-Efficiency Red.
 2.Trans / Transparent.
 3.2θ 1/2 The off-axis angle at which the luminous intensity is half the axial luminous intensity.

L-097 BL-Rxx38A Series	L-098 BL-Rxx38B Series
	
L-099 BL-Rxx38C Series	L-100 BL-Rxx39-T Series
	
L-101 BL-Rxx39A Series	L-102 BL-Rxx39B Series
	
L-103 BL-Rxx30 Series	L-104 BL-Rxx30A-T Series
	

Notes : 1.All Dimensions are in millimeters (inches).
2.Tolerance is $\pm 0.25\text{mm}$ (.010").