

END-LOOK PACKAGE PIN PHOTO DIODE

● Features


1. Wide receiving angle
2. Linear response vs. irradiance
3. Fast switching time
4. End-looking Package ideal for space limited applications
5. Lens Appearance: Black
6. This product don't contained restriction substance, compliance ROHS standard.

● Description

The BPD-BQB934 device consists of a PIN silicon photodiode molded in a black epoxy package which allows spectral response infrared light wavelengths. The wide receiving angle provides relatively even reception over a large area. The end-looking package is designed for easy PC board mounting. This photodiode is mechanically and spectrally matched to BRIGHT's GaAs and GaAlAs series of infrared emitting diodes.

● Absolute Maximum Ratings(Ta=25°C)

● Package Dimensions:

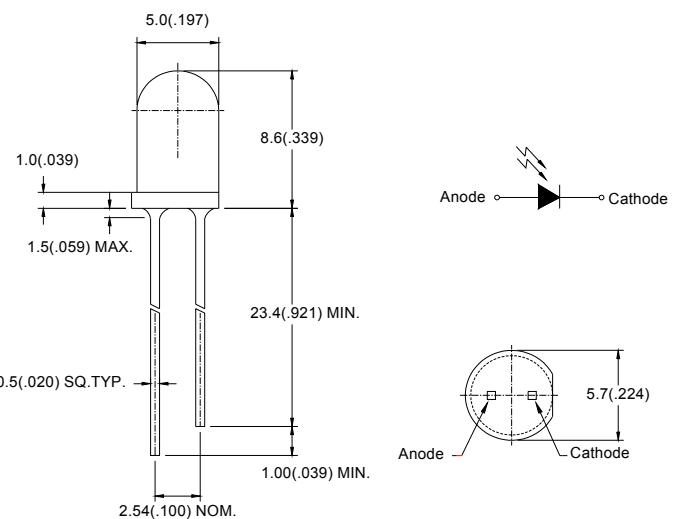

NOTES:









1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (0.01') unless otherwise specified.
3. Lead spacing is measured where the leads emerge from the package
4. Specifications are subject to change without notice

Parameter	Maximum Rating	Unit
Power Dissipation	100	mW
Reverse Breakdown Voltage	60V	
Operating Temperature	-45°C ~ +85°C	
Storage Temperature Range	-45°C ~ +100°C	
Lead Soldering Temperature	260°C for 5 seconds	


● Electrical Characteristics (TA=25°C unless otherwise noted)

PARAMETER	SYM BOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Reverse Light Current	I _L	-	42	-	μA	V _R =5V.Ee=1mW/cm ²
Reverse Dark Current	I _D	-	-	30	nA	V _R =10V.Ee=0 mW/cm ²
Reverse Break down Voltage	V _(BR)	30	-	-	V	I _R =100μA
Forward Voltage	V _F	-	-	1.2	V	I _F =1mA
Total Capacitance	C _T	-	21	-	PF	V _R =5V.Ee=0,f=1.0MHZ
Rise Time/ Fall Time	tr/tf	-	50	-	ns	V _R =20V,λ=850nm.RL=50Ω


● Typical Optical-Electrical Characteristic Curves

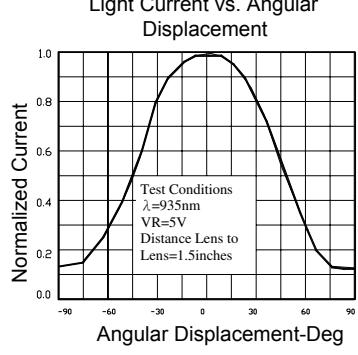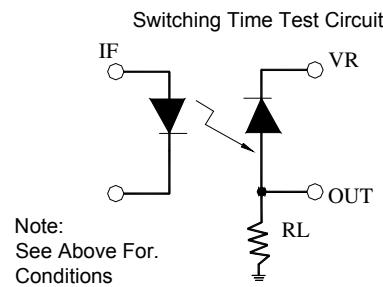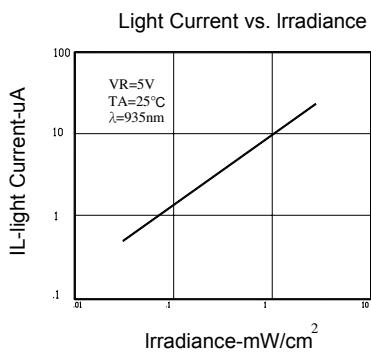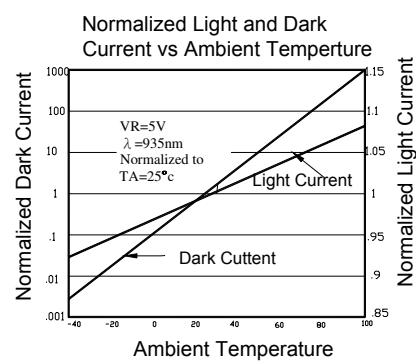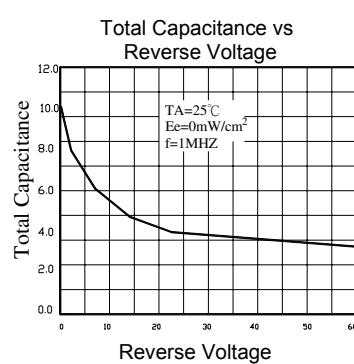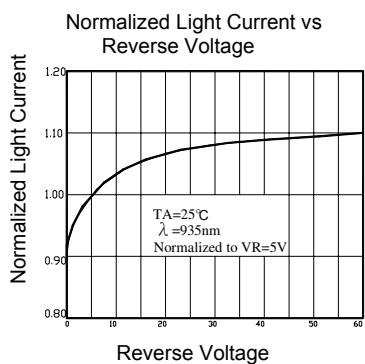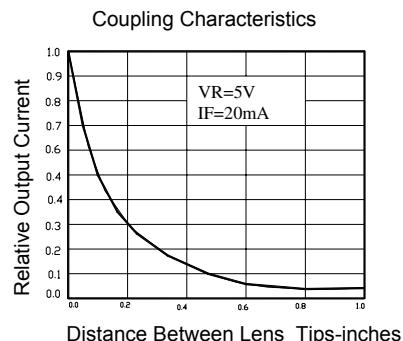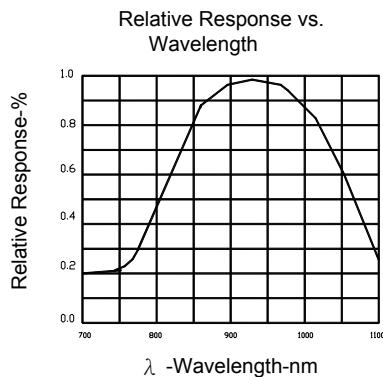

● Tapping and packaging specifications(Units: mm)

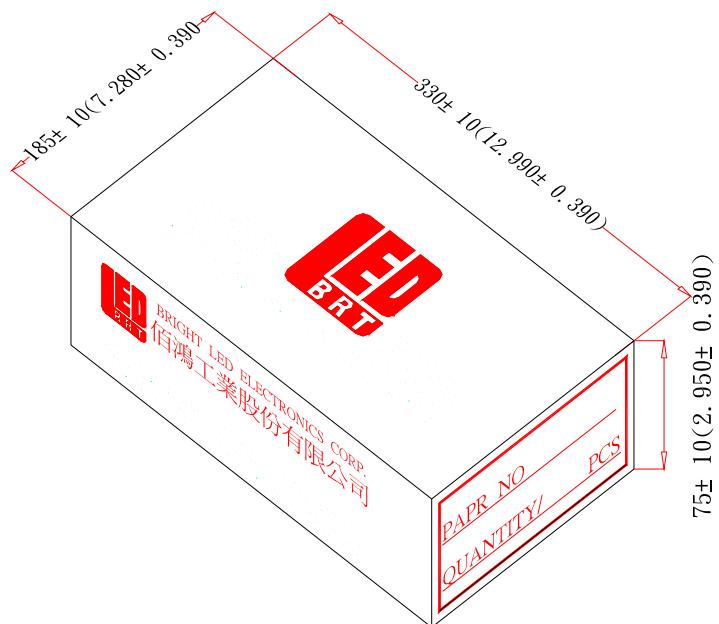

● Packaging Bag Dimensions

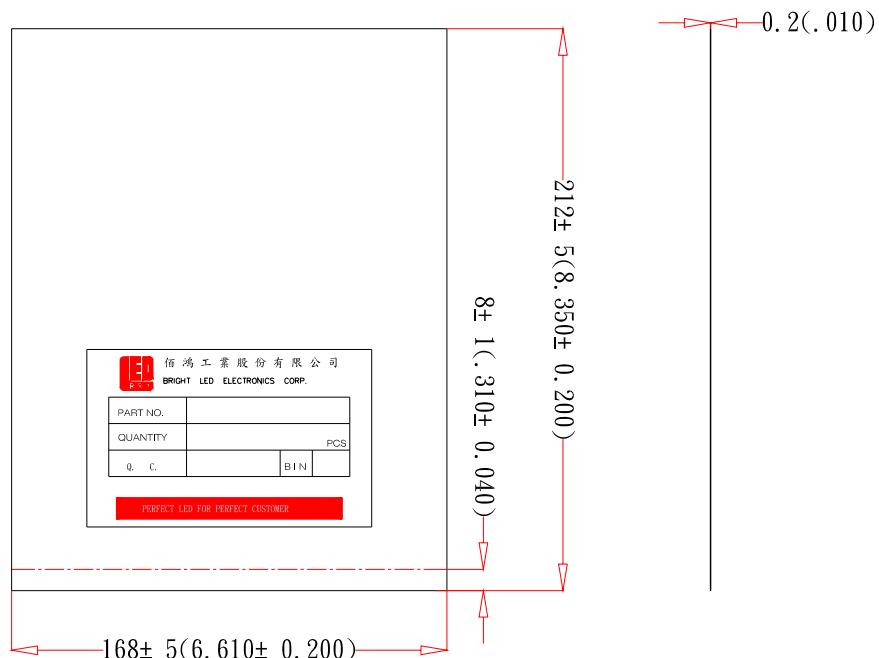

Notes:

- 1、500pcs per bag,5Kpcs per box.
- 2、All dimensions are in millimeters(inches).
- 3、Specifications are subject to change without notice.