



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'	~	LJC 09/04/08'
B	PACKING CHANGE	JLZ 03/23/16'	HZW 03/23/16'	LJC 03/23/16'

NOTES:


- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING:1.0 Amp.
  - INSULATION RESISTANCE:1000MΩ Min.
  - DIELECTRIC WITHSTANDING:300VAC.
  - CONTACT RESISTANCE:20mΩ Max.
  - OPERATING TEMPERATURE:-40°C TO+105°C.
- PART NUMBER: DS1064-16
- PRODUCT NUMBER CODE:

DS1064-16 - X X X X X - X

- PLATING LEVEL  
3A: 3A LEVEL
- PACKING TYPE  
A: TUBE  
B: TRAY
- HOUSING COLOR  
B:BLACK
- CONTACT PLATING  
8: FULL GOLD FLASH  
6: FULL TIN
- MOUNTING TYPE  
V: STRAIGHT TYPE
- No.OF CONTACTS  
10 20 26 30 34  
40 50 60 68 70  
80 90 100

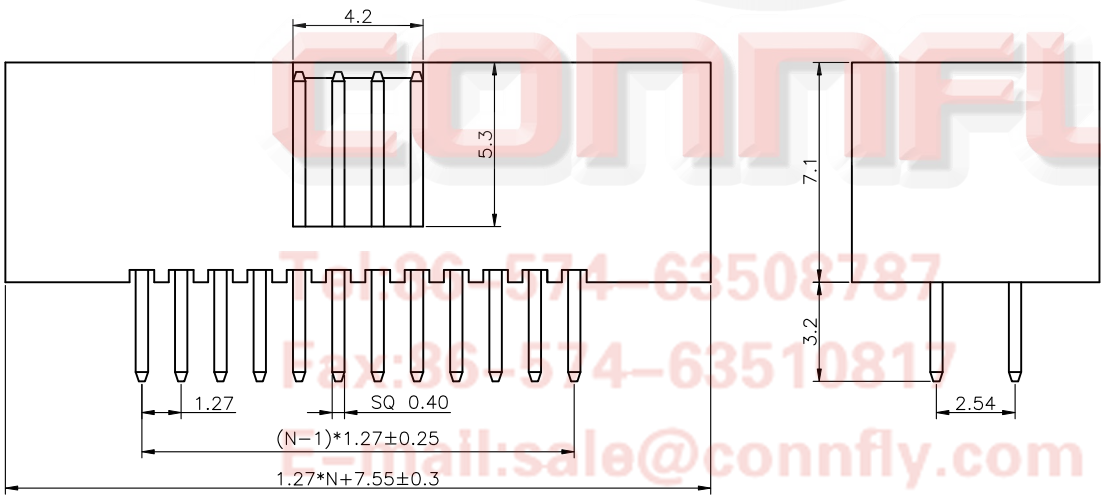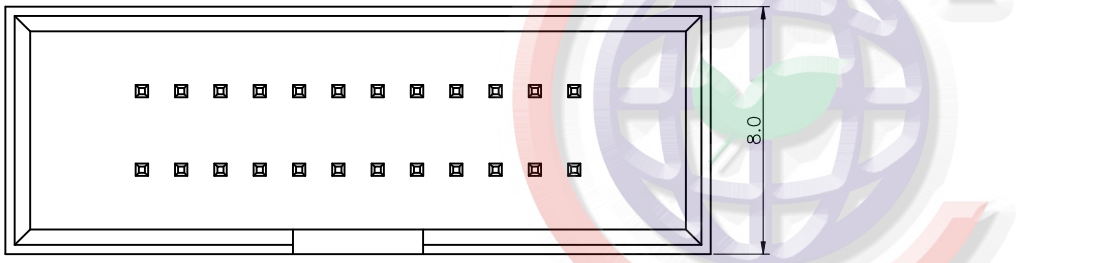

N=No.OF CONTACTS/2

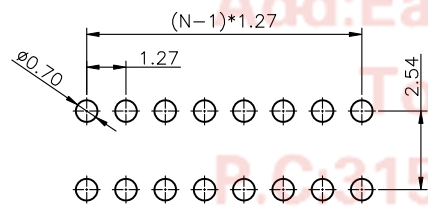

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1064-16-XXXXX-X-B		

PROJECTION	TITLE
UNITS	1.27*2.54mm BOX HEADER PITCH
SHEET SIZE	SERIES DS1064-16 SERIES

**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**