


# SPECIFICATION

- 1. Rated Voltage ..... 12 V
- 2. Operating Voltage ..... 7~16 V
- 3. Max. Rated Current ..... 40mA
- 4. Coil Resistance ..... 140±14 Ω
- 5. Coil Impedance ..... 240 Ω
- 6. Min. Sound Pressure Level ..... 85dB/10cm
- 7. Resonant Frequency ..... 2400Hz
- 8. Case Material ..... PBT
- 9. Operating Temperature ..... -20~+70°C
- 10. Store Temperature ..... -30~+80°C
- 11. Weight ..... 2g

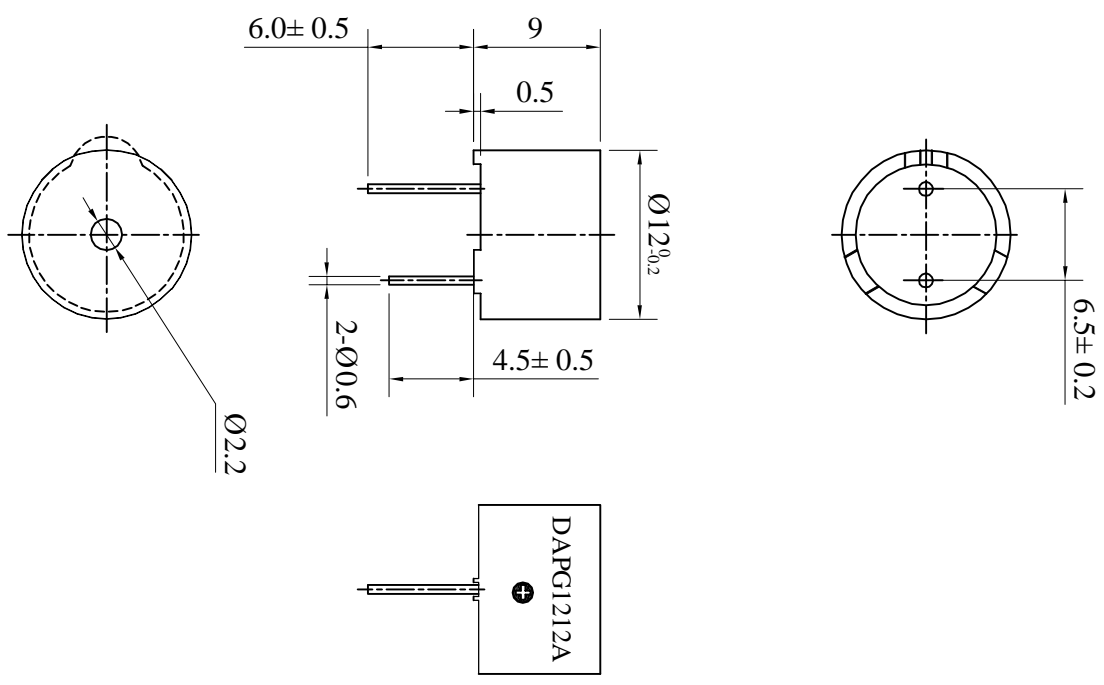

Compliance with ROHS		<b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>	
Magnetic Buzzer		DAPG1212A	
No.	DESCRIPTION	APPROVED	DATE
<small>           NO. OF APPROVALS            X *            XX *            XXX *            90° FORBIDEN *            FIRST ANGLE ISOMETRIC         </small>			
DRAWN	APPROVALS	DATE	
X	WMX	06.10.05	
X	LXB	06.10.05	
X	WDY	06.10.05	
UNIT		OEM1858R	
mm		SHEET	
SCALE		VER 1.0	
NOT TO SCALE			