

受 控

SPECIFICATION


1. SCOPE

This specification is applied to the piezo-element.

2. SPECIFICATION

(at 25°C)

2.1 Resonant Frequency	:	1.3 ± 0.3 KHz
2.2 Resonant Resistace	:	500 Ω max
2.3 Capacitance	:	60000 pF ± 30% at 100Hz
2.4 Input Voltage	:	30 Vp-p max
2.5 Operating Temperature	:	-20~+50°C
2.6 Storage Temperature	:	-20~+70°C
3. DIMENSION	:	as per figure

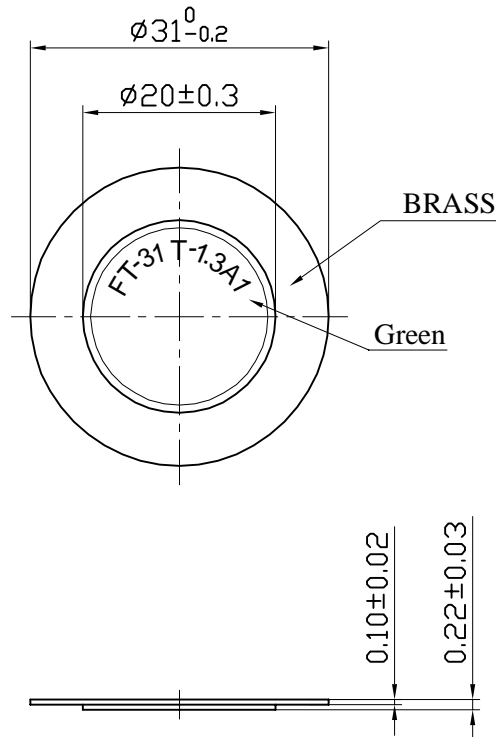

<p>TOLERANCES UNLESS NOTED OTHERWISE</p> <p>.X ±</p> <p>.XX ±</p> <p>.XXX ±</p> <p>90° FORMED +2°</p> <p>ANGLES -1°</p> <p>FIRST ANGLE PROJECTION</p>	DRAWN	汪逸	KEPO MODEL NO.	CUSTOMER			
	DESIGN		FT-31T-1.3A1-1926	QUARTZ-1			
	CHECKED			CUSTOMER NO.			
	APPROVED	徐锦生	DWG NO.				
	DATE	10.12.06	OEM1926				
	CONTRACT NO.				VER	1.1	SCALE
AGENCY APPROVAL				UNIT	mm	SHEET	
			KEPO CO.,LTD.		TEL:(+86)574-88370330 FAX:(+86)574-88370329		