

1

2

3

4

SPECIFICATION

受 控


1. SCOPE

This specification is applied to the piezo-element.

2. SPECIFICATION

(at 25 °C)

2.1 Resonant Frequency	:	3.9 ± 0.5KHz
2.2 Resonant Resistace	:	150 Ω max
2.3 Capacitance	:	120000pF ± 30% at 100Hz
2.4 Input Voltage	:	30Vp-p max
2.5 Operating Temperature	:	-20~+50°C
2.6 Storage Temperature	:	-20~+60°C
3. DIMENSION	:	as per figure

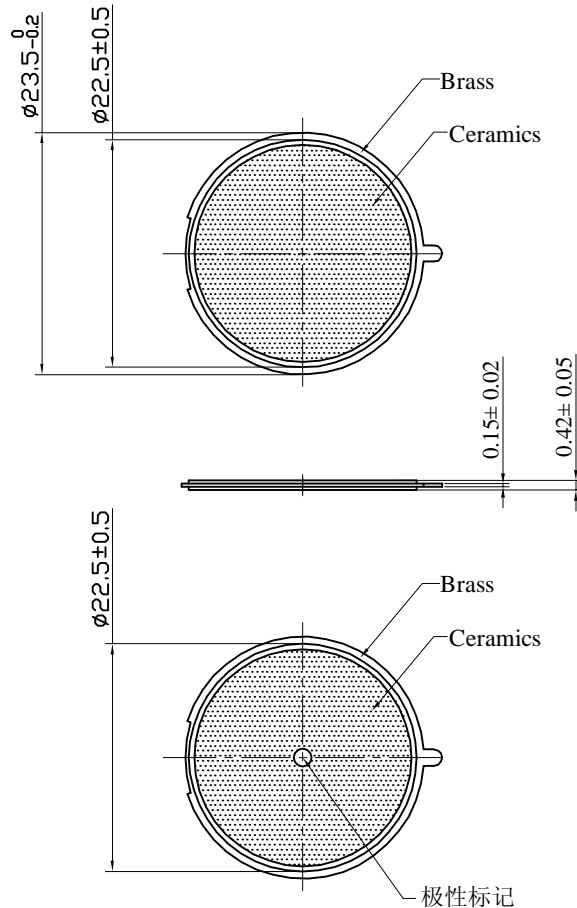


TOLERANCES UNLESS NOTED OTHERWISE

.X ±
.XX ±
.XXX ±

90° FORMED +2°
ANGLES -1°

FIRST ANGLE PROJECTION



DRAWN

汪逸

KEPO MODEL NO.

CUSTOMER:

DESIGN

HFT-23.5T-3.9AS

CUSTOMER NO.

CHECKED

DWG NO.

APPROVED

徐锦生

DATE

10.01.07

KP3.844.806.01

VER

1.0

SCALE

CONTRACT NO.

UNIT

mm

SHEET

AGENCY APPROVAL

KEPO CO.,LTD.

TEL:(+86)574-88370330

FAX:(+86)574-88370329

1

2

3

4