



Specifications

- 1. Rated Voltage.....12 VDC
- 2. Operating Voltage.....3~20 VDC
- 3. Max. Rated Current.....15mA at 12 VDC
- 4. Min. Sound Pressure Level.....95dB at 12VDC/30cm
- 5. Resonant Frequency.....2.9±0.5KHz
- 6. Tone Nature.....Slow Pulse
- 7. Case Material.....ABS
- 8. Operating Temperature.....-20~+60°C
- 9. Store Temperature.....-30~+70°C
- 10. Weight.....12g

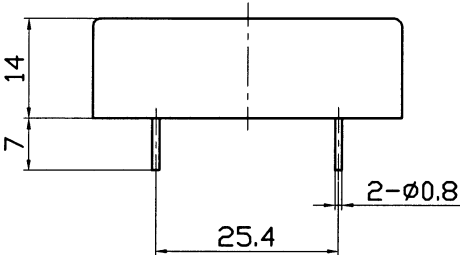

KPI-4332

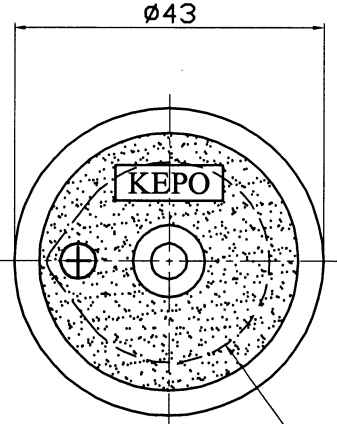

KPI-3010 Washing Label

		KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
No.	DESCRIPTION	APPROVED	DATE
TOLERANCES UNLESS NOTED OTHERWISE X .X .XX .X XXX .X 90° FORMED +.2° ANGLES .1°		APPROVALS	DATE
FIRST ANGLE PROJECTION		DRAWN	DATE
		CHECKED	DATE
		APPROVED	DATE
			08.05.22
		UNIT	DWG NO.
		mm	OEM2947
		SCALE	SHEET
		NOT TO SCALE	VER 1.0