
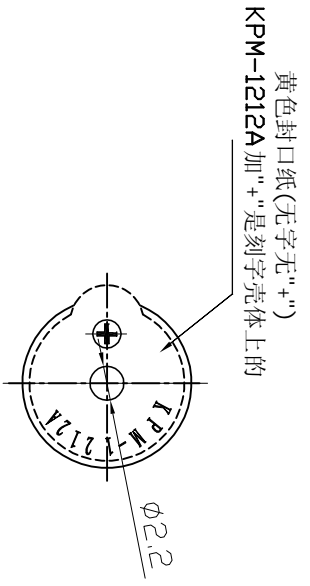
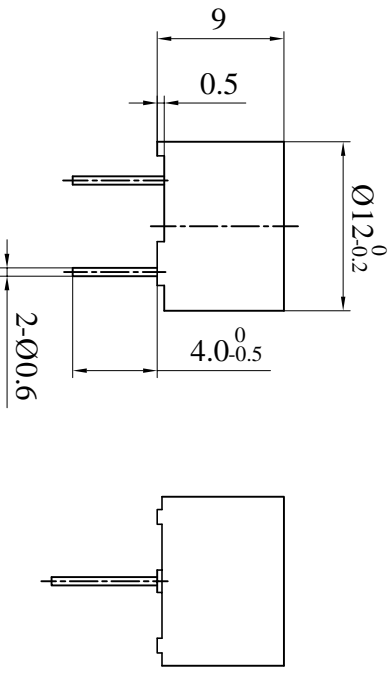


受 控

## SPECIFICATION

- 1. Rated Voltage ..... 12 V
- 2. Operating Voltage ..... 4~16 V
- 3. Max. Rated Current ..... 40mA
- 4. Coil Resistance ..... 140±14Ω
- 5. Coil Impedance ..... 240Ω
- 6. Min. Sound Pressure Level ..... 85dB/5V/10cm 90dB/12V/10cm
- 7. Resonant Frequency ..... 2048Hz
- 8. Case Material/Color ..... PBT/Black
- 9. Operating Temperature ..... -30~+85°C
- 10. Store Temperature ..... -30~+85°C
- 11. Weight ..... 2g



<b>Compliance with ROHS</b>	
<b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>	
客户名称: 惠尔浦 Magnetic Buzzer: KPM-G1212A9-9121	
No.	DESCRIPTION
NO. OF PARTS	
DRAWN	
CHECKED	
APPROVED	
DATE	DATE
12.08.15	12.08.15
mm	mm
SCALE	SCALE
NOT TO SCALE	NOT TO SCALE
SHEET	SHEET
OEM9121R	OEM9121R
VER 1.1	VER 1.1