

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D



D

E

E

F

F

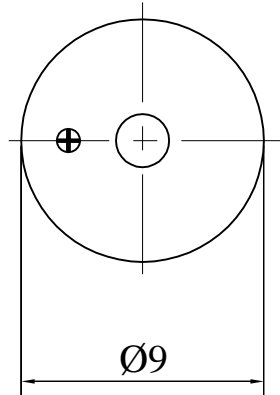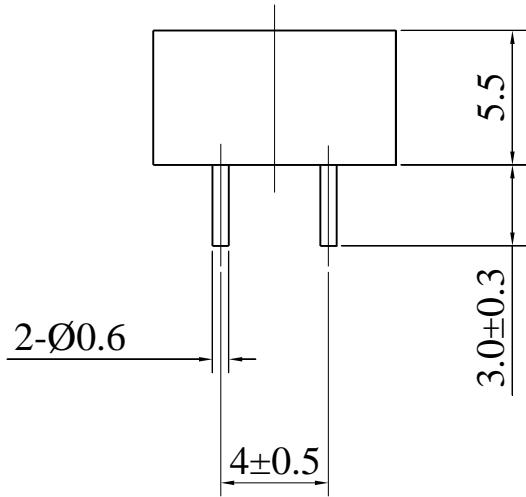

SPECIFICATION

- 1. Rated Voltage5 V
- 2. Operating Voltage4~8 V
- 3. Max. Rated Current 40 mA
- 4. Coil Resistance40±4 Ω
- 5. Coil Impedance80 Ω
- 6. Min. Sound Pressure Level85dB/10cm
- 7. Resonant Frequency3200Hz
- 8. Shell Material/ColorPBT/Black
- 9. Operating Temperature-20~+70°C
- 10. Store Temperature-30~+80°C
- 11. Weight 1g

				KEPO NINGBO KEPO IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Magnetic Buzzer	
				KPM09C24	
No.	DESCRIPTION	APPROVED	DATE		
TOLERANCES UNLESS NOTED OTHERWISE		APPROVALS		DATE	
X =		DRAWN		UNIT	
XX =		CHECKED		DWG NO.	
XXX =		APPROVED		mm KP3.840.696.16	
90° FORMED ±2°				SCALE	
ANGLES ±1°				NOT TO SCALE	
FIRST ANGLE PROJECTION				SHEET	
				VER 1.0	
		04.04.13			

1

2

3

4

5

6

7

8