
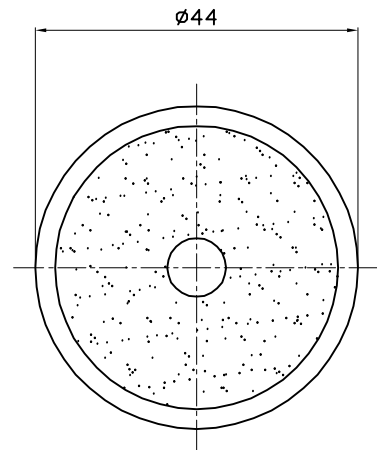


SPECIFICATION

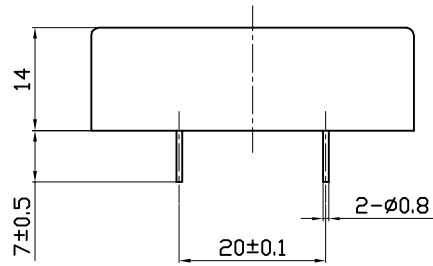

1. Rated Voltage12Vp-p Square Wave
2. Max. Rated Long Power30Vp-p
3. Max. Rated Current5mA at 1.0KHz/12Vp-p Square Wave
4. Min. Sound Pressure Level80dB/1.0KHz/12Vp-p Square Wave/30cm
5. Capacitance at 120Hz66000±30%
6. Resonant Frequency1.0±0.5KHz
7. Case MaterialABS
8. Operating Temperature-20~+60°C
9. Store Temperature-30~+70°C
10. Weight10g

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
No.		DESCRIPTION	APPROVED	DATE	Piezo Transducer KPT-4412
			APPROVALS	DATE	
TOLERANCES UNLESS NOTED OTHERWISE: X . * XX + * XXX * 90° FORMED -2° * ANGLES ± * FIRST ANGLE PROJECTION		DRAWN			UNIT
		CHECKED			mm
		APPROVED		05.08.23	SCALE
					DWG NO.
					KP3.840.231
					SHEET
					VER 1.0