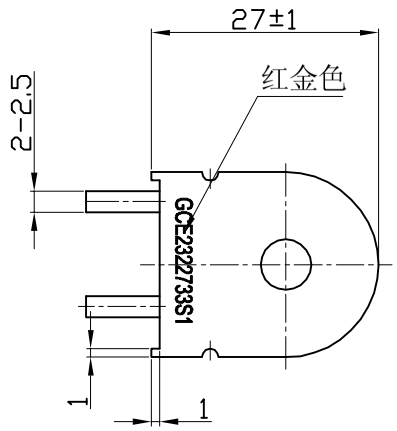

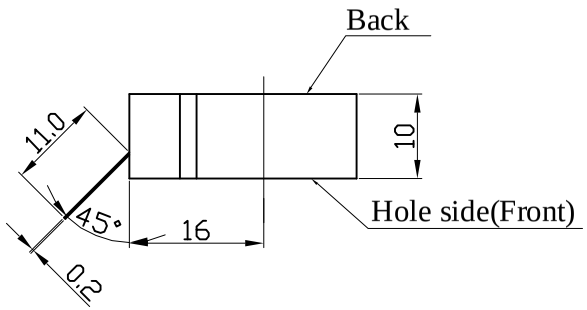

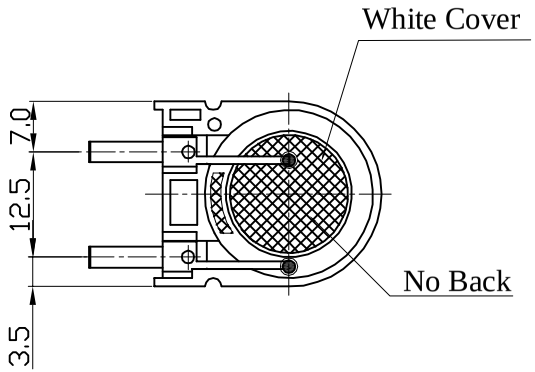

SPECIFICATION

1.Rated Voltage.....12Vp-p Square Wave
2.Operating Voltage.....30Vp-p Square Wave
3.Max. Rated Current.....10mA at 3.1KHz/12Vp-p Square Wave
4.Min. Sound Pressure Level.....95dB at 3.1KHz/12Vp-p Square Wave/10cm
5.Resonant Frequency.....3.1KHz
6.Capacitance .....30nF ±30%
7.Housing Material/Color.....PC(UL94V-0)/Black
8.Operating Temperature.....-20~+80℃
9.Store Temperature .....-30~+100℃
10.Weight 3.5g

Compliance with RoHS

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Piezo Transducer
KPT-G2311V2

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED +2.° ANGLES -1.°
FIRST ANGLE PROJECTION

APPROVALS	DATE
DRAWN	
CHECKED	
APPROVED	06.11.16

UNIT	DWG NO.	
mm	KP3.840.297R	
SCALE	SHEET	VER 1.1