





SPECIFICATION

- 1. Rated Voltage 3VDC
- 2. Operating Voltage 2~5VDC
- 3. Max Rated Current 30mA/3VDC
- 4. Min. Sound Pressure Level 85dB/10cm
- 5. Resonant Frequency 2300±500Hz
- 6. Response Time 50ms
- 7. Case Material PBT
- 8. Operating Temperature -30~+80°C
- 9. Store Temperature -30~+80°C
- 10. Weight 2g

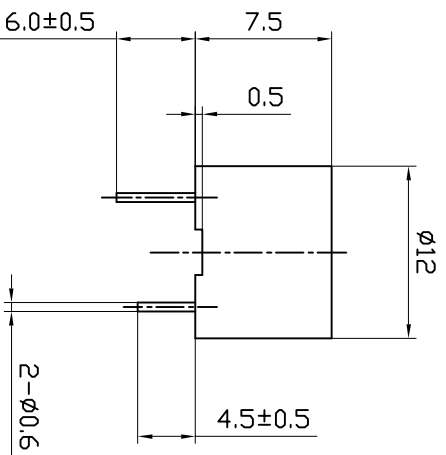

No.		DESCRIPTION		APPROVED		DATE		KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
FORMING		APPROVALS		DATE		DATE			
DRAWN		CHECKED		APPROVED		05.03.03		UNIT: mm SCALE: NOT TO SCALE SHEET: KP3, 8:40.693 VER: 1.3	
90° FORMER 2.5° 180° FORMER 180° 180° FORMER 180° 180° FORMER 180° 180° FORMER 180° 180° FORMER 180°		DRAWN CHECKED APPROVED		DATE DATE DATE		DATE DATE DATE		UNIT: mm SCALE: NOT TO SCALE SHEET: KP3, 8:40.693 VER: 1.3	

