


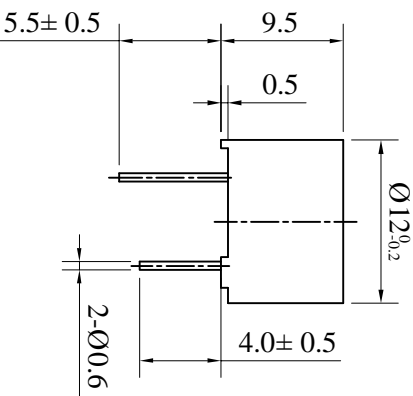


SPECIFICATION

- 1. Rated Voltage 12VDC
- 2. Operating Voltage 8-15VDC
- 3. Max. Rated Current 30mA/12VDC
- 4. Min. Sound Pressure Level 85dB/10cm
- 5. Resonant Frequency 2300±300Hz
- 6. Response Time 50ms
- 6. Case Material PBT
- 7. Operating Temperature -20~+70°C
- 8. Store Temperature -30~+80°C
- 9. Weight 2g



Compliance with ROHS			
KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
Magnetic Buzzer KPX-G1212A			
No.	DESCRIPTION	APPROVED	DATE
FOR THE CUSTOMERS X X X X 90° TURNED 9.2° TAPER ANGLES 10°/MINIMUM		DRAWN	DATE
		CHECKED	DATE
		APPROVED	DATE
		06.07.03	SCALE
		NOT TO SCALE	SHEET
		KP3, 840, 689R	VER 1.0
		UNIT	DRAWING
		mm	mm