

SPECIFICATION


1. SCOPE

This specification is applied to the piezo-element.

2. SPECIFICATION

(at 25°C)

- | | | |
|---------------------------|---|-------------------------|
| 2.1 Resonant Frequency | : | 3.3 ± 0.5 KHz |
| 2.2 Resonant Resistace | : | 500 Ω max |
| 2.3 Capacitance | : | 30000 pF ± 30% at 100Hz |
| 2.4 Input Voltage | : | 30 Vp-p max |
| 2.5 Operating Temperature | : | -20 ~ +60 °C |
| 2.6 Storage Temperature | : | -20 ~ +70 °C |
| 3. DIMENSION | : | as per figure |

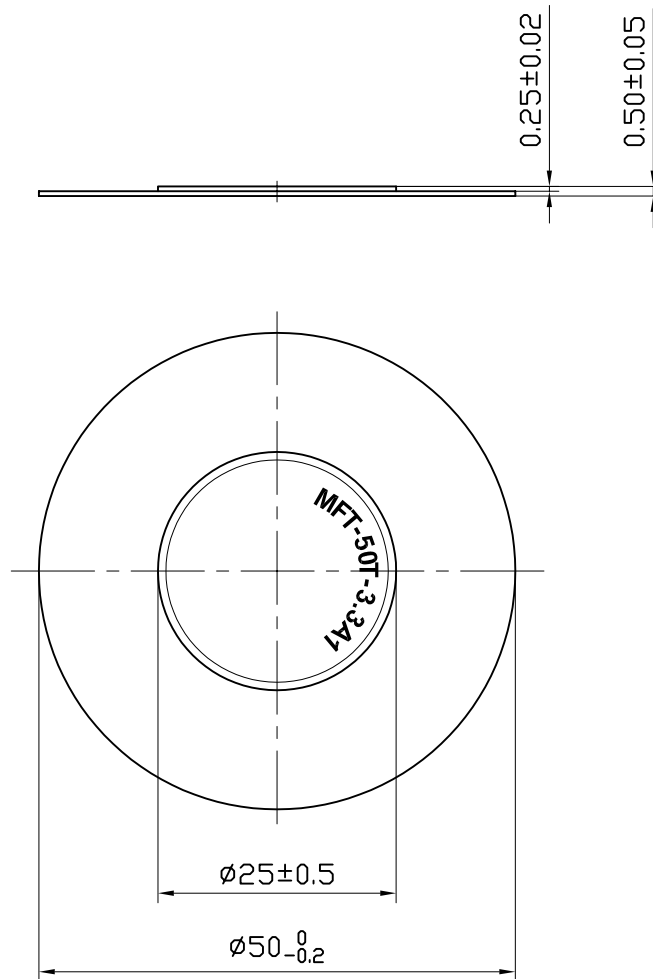

TOLERANCES UNLESS NOTED OTHERWISE .X ± .XX ± .XXX ± 90° FORMED +2° ANGLES -1°	DRAWN		KEPO MODEL NO.	CUSTOMER: QUARTZ			
	DESIGN		MFT-50T-3.3A1	CUSTOMER NO.			
	CHECKED						
	APPROVED		DWG NO.	VER	1.0	SCALE	
	DATE	07.10.15	OEM2697	UNIT	mm	SHEET	
	CONTRACT NO.		KEPO CO., LTD.		TEL: (+86)574-88370330		
	AGENCY APPROVAL				FAX: (+86)574-88370329		
FIRST ANGLE PROJECTION							