

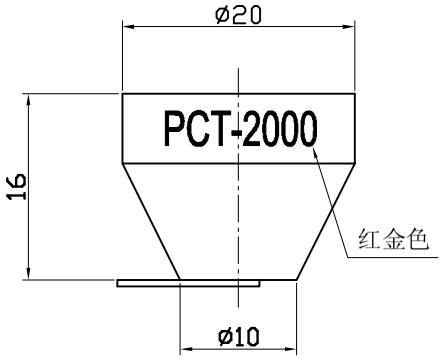

SPECIFICATION

1.Rated Voltage 10Vp-p
2.Max.Rated Input Voltage 30Vp-p
3.Resonant Frequency .....25±3KHz
4.Rated Frequency Range .....2.5～30 KHz
5.Rated Sensitivity .....80±3dB/w.m
6.Case Material .....PBT
7.Operating Temperature .....-20～+70℃
8.Store Temperature .....-30～+80 ℃

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED ANGLES +2° -1°
FIRST ANGLE PROJECTION

APPROVALS	DATE
DRAWN	
CHECKED	
APPROVED	05.08.05

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Tweeter
PCT-2000

UNIT mm | DWG NO. KP3.840.504
SCALE NOT TO SCALE | SHEET | VER 1.2