

SPECIFICATION

FOR APPRONAL

Customer : _____

Product Name : Mechanical Buzzer _____

Model Name : VSMB2215P _____

Drawing No. : VS20190517006 _____

Signature of Voice

Approved by	Checkde by	Issued by	Date

 **福爱斯电子有限公司**
VOISE ELECTRONICS CO.,LTD.

Address:No 96 Mogao Dongqian Lake Industial Area ningbo,China,
Tel:0086-0574-87773030;Fax:0086-0574-87471600 P.C.315121
<http://www.nbvoise.com> Email:sales@nbvoise.com

Table of contents

- 1. Revision
- 2. Scope
- 3. General Characteristics
- 4. Electrical and Acoustic Characteristics.
- 5. Dimensions
- 6. Packing

1. Revision

Rev.No.	Date	Page	Description of Revision
1.0	2019/5/17		Preliminary

Specification for Mechanical Buzzer		Page	3/5
		Revision No.	1.0
Model No. : VSMB2215P		Drawing No.	VS20190517006
<h2>2. Scope</h2> <p>This specification is applied to the buzzer used for sounder in alarm systems, Please contact us when using this product for any other applications than described in the above.</p>			
<h2>3. General</h2> <p>3.1 Out-Diameter : 23x16 mm</p> <p>3.2 Height : 15 mm</p> <p>3.3 Weight : 10 ±3g</p> <p>3.4 Operating Temperature range: -20~+60°C without loss of function</p> <p>3.5 Store Temperature range: -30~+70°C without loss of function</p>			
<h2>4. Electrical and Acoustic Characteristics.</h2> <p>Test condition : 15 ~ 35 °C, 25% ~ 85% RH, 860~1060 mbar</p>			
No	Items	Specification	
1	Rated Voltage	1.5V DC	
2	Working Voltage	1.3-2 VDC	
3	Max Rated Current	30mA/1.5VDC	
4	Min Sound Preesure Level	70dB/1.5VDC/20cm	
5	Resonant Frequency	400±100Hz	
6	Housing Material	ABS	
7	Color	Black	
8	Waterproof	IP60	

Specification for Mechanical Buzzer

Page

4/5

Revision No.


1.0

Model No. : VSMB2215P

Drawing No.

VS20190517006

5. Dimensions

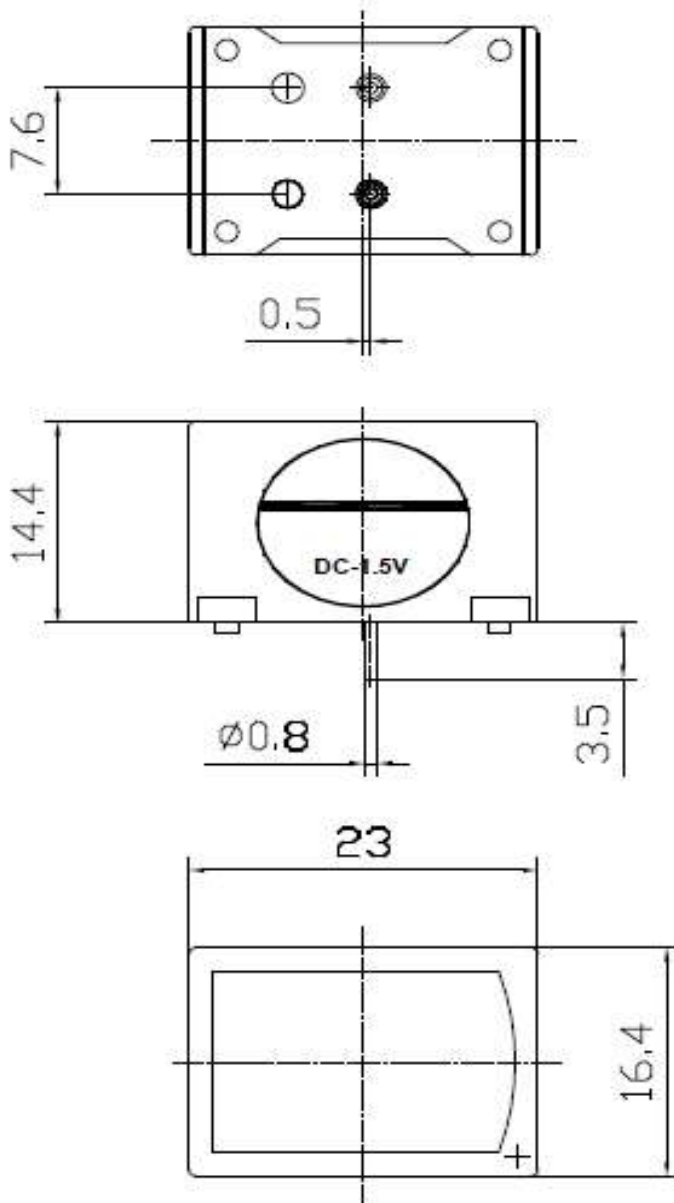

FIRST ANGLE PROJECTION



UNIT : mm

Tolerance : ±1.5

Specification for Mechanical Buzzer	Page	5/5
	Revision No.	1.0
Model No. : VSMB2215P	Drawing No.	VS20190517006
<p>6. Packing</p> <p>Each minimum package unit of products shall be in a carton box and it shall be clearly marked with Part Number ,quantity and outgoing inspection number.</p> <p>There shall be no mechanical damage on products during in storage.</p> <p style="text-align: right;">Total:200 pcs per box Size:41.5x27x31cm</p>		