
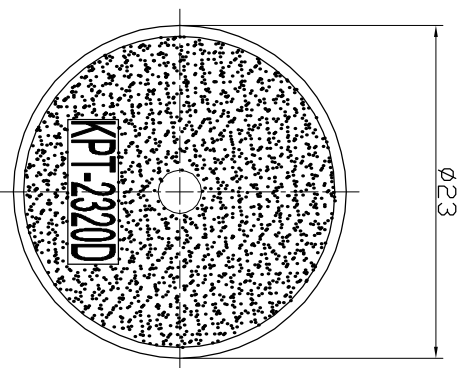


SPECIFICATION

1. Rated Voltage9Vp-p Square Wave
2. Max. Allowable Voltage30Vp-p Square Wave
3. Max. Rated Current3mA at 2.0KHz/9Vp-p Square Wave
4. Resonant Frequency2.0±0.5KHz
5. Min. Sound Pressure Level.....78dB at 2.0KHz/9Vp-p Square Wave/10cm
6. Capacitance at 100Hz35000pF±30%
7. Shell Material/ColorPA/Black
8. Operating Temperature-20~+80℃
9. Store Temperature-30~+100℃
10. Weight2.5g

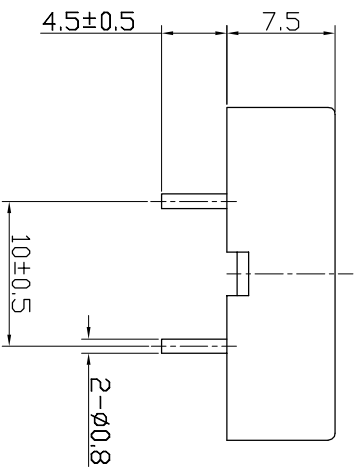

Compliance with ROHS

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
<http://www.chinaacoustic.com>

杭州达峰

Piezo Transducer
KPT-G2320D

No.	DESCRIPTION	APPROVED	DATE	UNIT	SCALE	SHEET	VER.
1. 符合 ROHS 标准 2. 符合 GB 18309 标准 3. 符合 GB 18309 标准 4. 符合 GB 18309 标准 5. 符合 GB 18309 标准 6. 符合 GB 18309 标准 7. 符合 GB 18309 标准 8. 符合 GB 18309 标准 9. 符合 GB 18309 标准 10. 符合 GB 18309 标准							
DRAWN	APPROVALS	DATE		mm		OEM1763R	1.0
CHECKED							
APPROVED			05.09.07				